


WAAS CH <b>93702</b> <b>W06A</b>	APP CRS <b>057°</b>	Rwy Ldg TDZE Apt Elev	<b>7201</b> <b>2351</b> <b>2351</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 6

GENERAL WM J FOX AIRFIELD (WJF)

RNP APCH - GPS.	<p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using PMD altimeter setting. When local altimeter setting not received, use PMD altimeter setting and increase LPV DA to 2646 feet, increase LNAV/VNAV DA to 2694 feet, increase all MDAs 60 feet, and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.</p>	MISSED APPROACH: Climb to 6000 direct SISOY and on track 091° to ETHER and hold.
-----------------	---	--


ATIS <b>126.3</b>	JOSHUA APP CON <b>126.1 290.3</b>	FOX TOWER* <b>118.525 (CTAF) 256.9</b>	GND CON <b>121.7 256.9</b>	UNICOM <b>122.95</b>
----------------------	--------------------------------------	---	-------------------------------	-------------------------

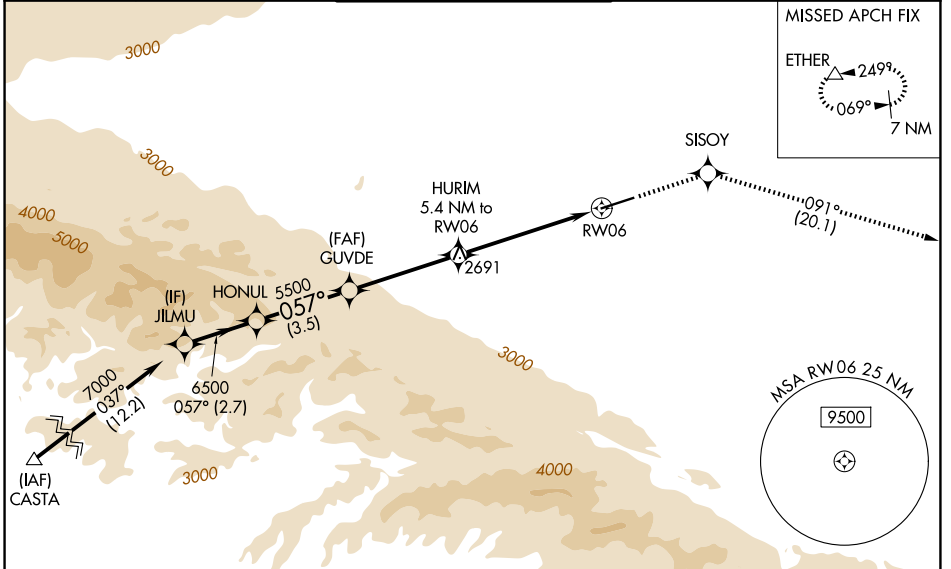

SW-3, 14 MAY 2026 to 11 JUN 2026

SW-3, 14 MAY 2026 to 11 JUN 2026

ELEV 2351	TDZE 2351
-----------	-----------

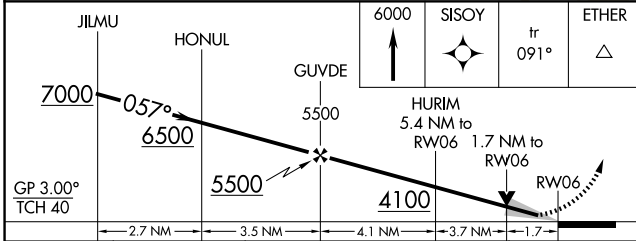

CATEGORY	A	B	C	D
LPV DA	2601-1		250 (300-1)	
LNAV/VNAV DA	2649-1		298 (300-1)	
LNAV MDA	2940-1 589 (600-1)		2940-1¾ 589 (600-1¾)	
CIRCLING	2940-1 589 (600-1)		3120-2¼ 769 (800-2¼) / 3120-2½ 769 (800-2½)	

