

WAAS CH 42719 W06A	APP CRS 065°	Rwy Ldg TDZE Apt Elev	3523 301 302
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6

WINGS FLD (LOM)



RNP APCH.
▼ Baro-VNAV NA when using Pottstown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Pottstown altimeter setting and increase all DA 35 feet and all MDA 40 feet; increase LPV Cats A/B visibility ½ mile. Rwy 6 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct HOMWE and hold.

AWOS-3 118.925	PHILADELPHIA APP CON 126.85 263.125	CLNC DEL 135.3	UNICOM 123.0 (CTAF) ①
--------------------------	---	--------------------------	---------------------------------

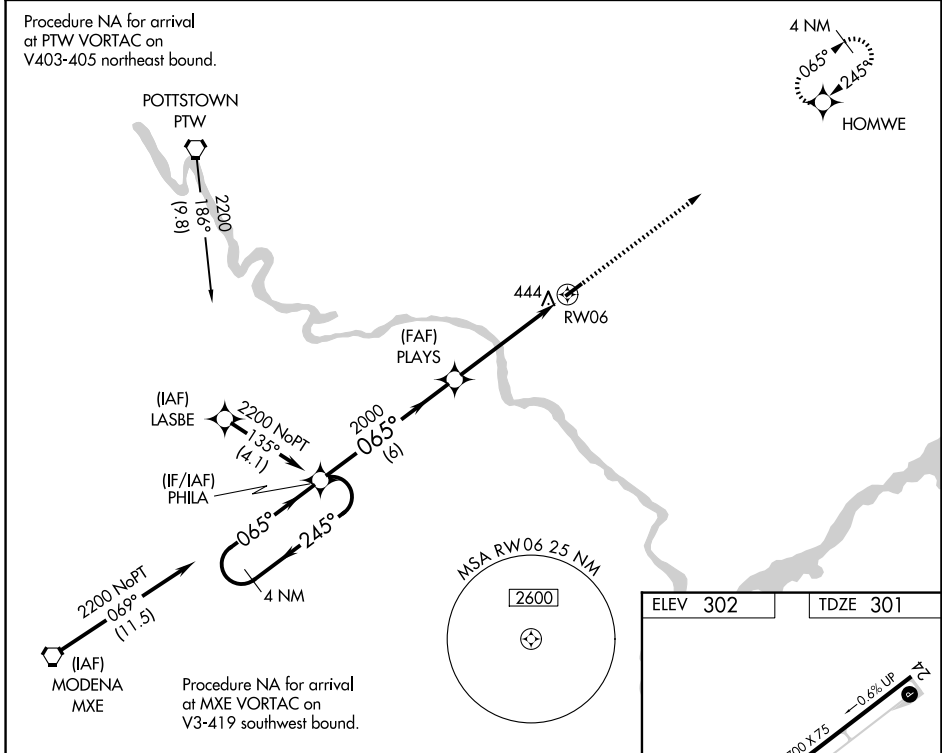

ELEV 302	TDZE 301
----------	----------

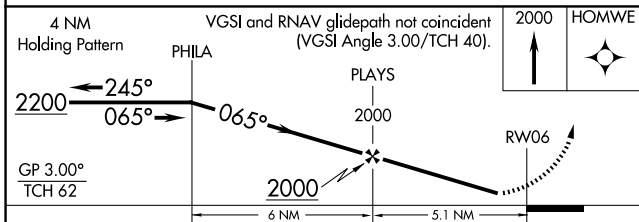

CATEGORY	A	B	C	D
LPV DA	614-1	313 (400-1)		NA
LNAV/VNAV DA	788-1¾	487 (500-1¾)		NA
LNAV MDA	720-1	419 (500-1)		NA
CIRCLING	780-1	478 (500-1)		NA

REIL Rwy 6 and 24 ①
MIRL Rwy 6-24 ①

NE-4, 14 MAY 2026 to 11 JUN 2026

NE-4, 14 MAY 2026 to 11 JUN 2026