




| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 77507 W29A | APP CRS 294° | Rwy Ldg TDZE Apt Elev | 8099 531 544 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 29



ST LOUIS RGNL (ALN)

| | | | |
|---|--|---|---|
| RNP APCH. | |  | MISSED APPROACH: Climb to 2400 direct SQUAR and hold. |
|  For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 3/8 SM and LNAV Cat C/D visibility to 1 SM. | | | |

| | | | | |
|----------------------|--|---|-------------------------|-------------------------|
| ATIS 128.0 | ST LOUIS APP CON 124.2 353.9 | REGIONAL TOWER* 126.0(CTAF) 0 239.0 | GND CON 120.2 | UNICOM 122.95 |
|----------------------|--|---|-------------------------|-------------------------|

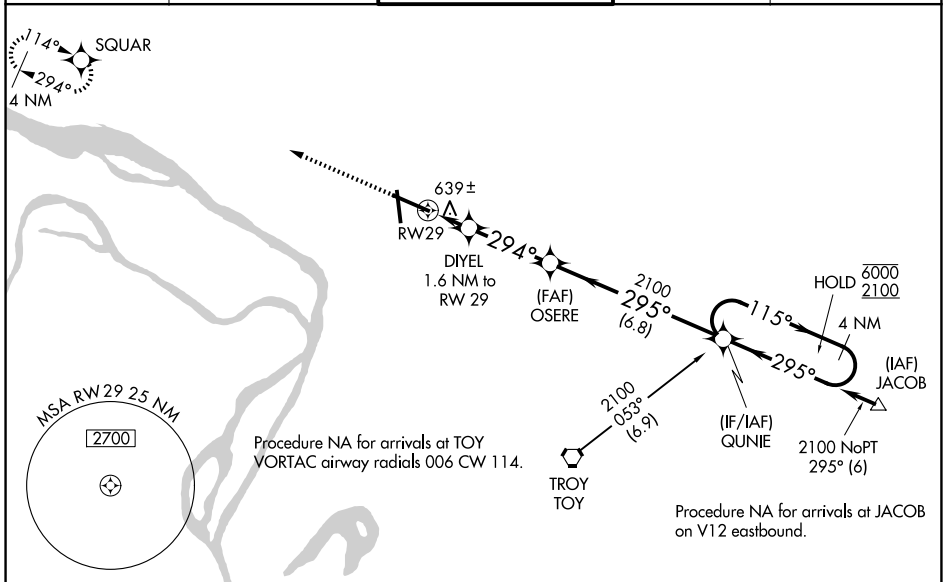

| | | |
|----------|----------|----------|
| ELEV 544 | D | TDZE 531 |
|----------|----------|----------|

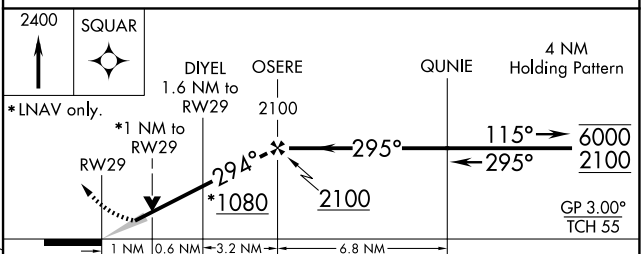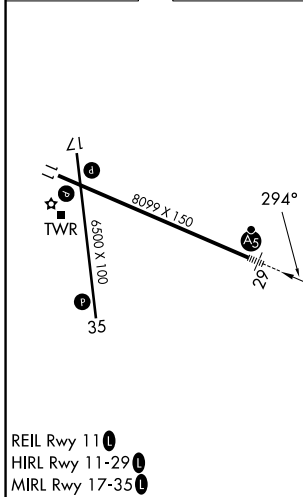

| | 1 NM | 0.6 NM | 3.2 NM | 6.8 NM | |
|--------------|---------|---------------|-------------------------------|---------------|-----------------------|
| CATEGORY | A | | B | C | D |
| LPV DA | | | 731-1/2 | 200 (200-1/2) | |
| LNAV/VNAV DA | | | 825-1/2 | 294 (300-1/2) | |
| LNAV MDA | 900-1/2 | 369 (400-1/2) | 900-3/4 | | 369 (400-3/4) |
| CIRCLING | 1000-1 | 456 (500-1) | 1160-1 3/4 616 (700-1 3/4) | | 1200-2 656 (700-2) |

EC-3, 14 MAY 2026 to 11 JUN 2026

EC-3, 14 MAY 2026 to 11 JUN 2026