WAAS CH 99501 W16A	APP CRS 159°	Rwy Ldg 5003 TDZE 1278 Apt Elev 1278

RNAV (GPS) RWY 16
MARSHFIELD MUNI (MFI)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using CWA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. Rwy 16 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use CWA altimeter setting and increase all DA 56 feet and LPV visibilities ⅛ SM; increase LNAV/VNAV visibilities ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct VECSU and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
121.575	124.4 317.7	123.0 (CTAF) L

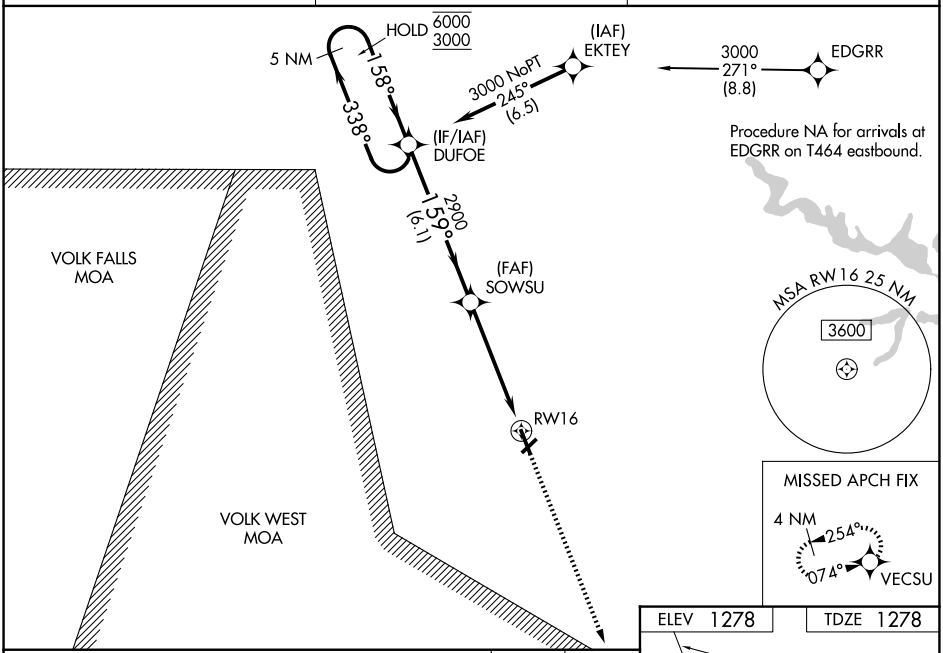

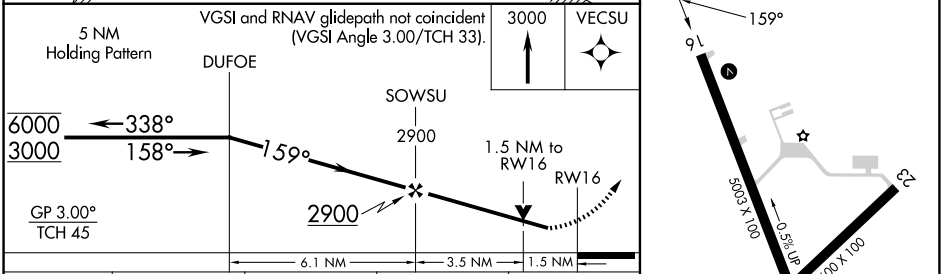

CATEGORY	A	B	C	D
LPV DA	1639-1 361 (400-1)			
LNAV/VNAV DA	1695-1⅛ 417 (500-1⅛)			
LNAV MDA	1780-1 502 (600-1)		1780-1⅜ 502 (600-1⅜)	
CIRCLING	1780-1 502 (600-1)		2020-2¼ 742 (800-2¼)	2020-2½ 742 (800-2½)

REIL Rwy 16 L
MIRL Rwys 5-23 and 16-34 L

EC-3, 14 MAY 2026 to 11 JUN 2026

EC-3, 14 MAY 2026 to 11 JUN 2026