

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 61126 W22A | APP CRS 224° | Rwy Idg TDZE Apt Elev | 5000 1662 1664 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 22

ROCKWOOD MUNI (RKW)

⚠ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting; increase LPV DA to 1987 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 2011 feet and visibility all Cats ¼ SM; increase all MDA 80 feet and increase LNAV Cat C and D visibility ¼ SM and Circling Cat C visibility ½ SM. Baro-VNAV NA when using Crossville altimeter setting.


MISSED APPROACH: Climb to 5300 direct CUTUK and hold, continue climb-in-hold to 5300.

| | | |
|--------------------------|--------------------------------------|-------------------------------|
| AWOS-3 118.775 | ATLANTA CENTER 133.6 254.3 | UNICOM 122.8 (CTAF) |
|--------------------------|--------------------------------------|-------------------------------|


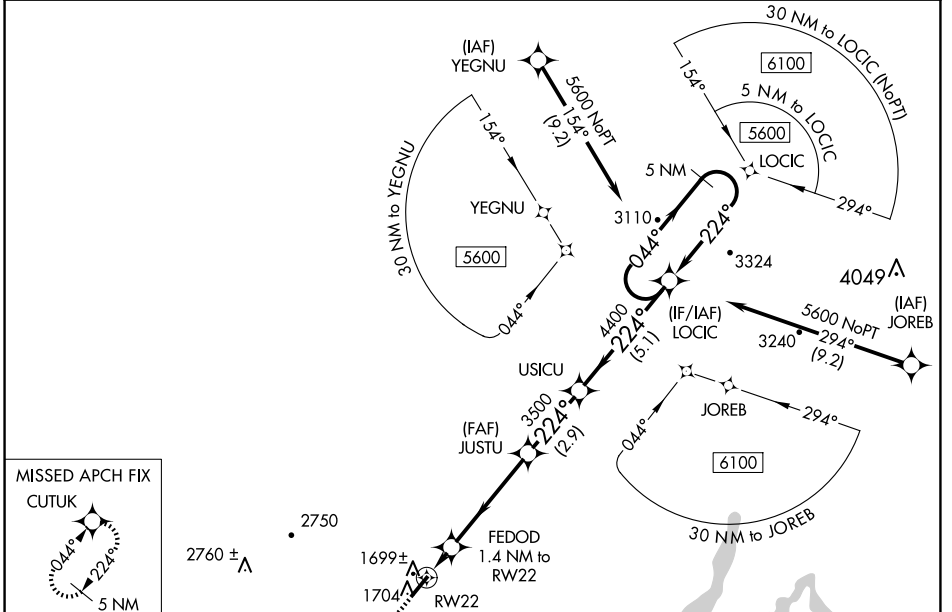


SE-1, 14 MAY 2026 to 11 JUN 2026

SE-1, 14 MAY 2026 to 11 JUN 2026



| | |
|-----------|-----------|
| ELEV 1664 | TDZE 1662 |
|-----------|-----------|

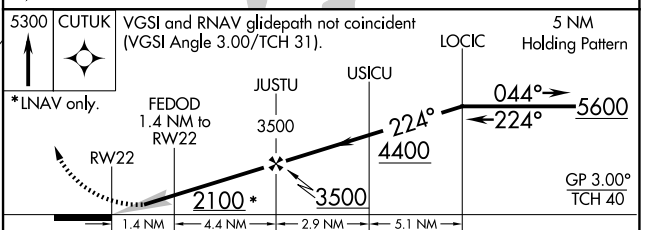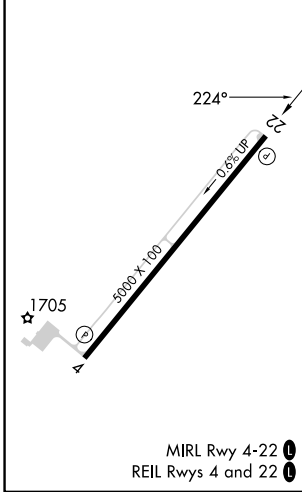

| CATEGORY | A | B | C | D |
|---------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA | | 1912-7/8 | 250 (300-7/8) | |
| LNAV/ VNAV DA | | 1936-7/8 | 274 (300-7/8) | |
| LNAV MDA | | 1980-1 | 318 (400-1) | |
| CIRCLING | 2100-1 436 (500-1) | 2200-1 536 (600-1) | 2260-1½ 596 (600-1½) | 2780-3 1116 (1200-3) |