


WAAS CH 49103 W06A	APP CRS 058°	Rwy Ldg TDZE Apt Elev	6500 67 67
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Z RWY 6

DEADHORSE (SCC) (PASC)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, and increase LNAV/VNAV all Cats and LNAV Cats C/D/E visibility to RVR 4500. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSRL AS	MISSED APPROACH: Climb to 500 then climbing right turn to 1900 direct CUBSU and hold.
--	--------------	---

AFIS 118.4	ANCHORAGE CENTER 134.4 370.9	DEADHORSE RADIO 123.6 (CTAF) 0
----------------------	--	--

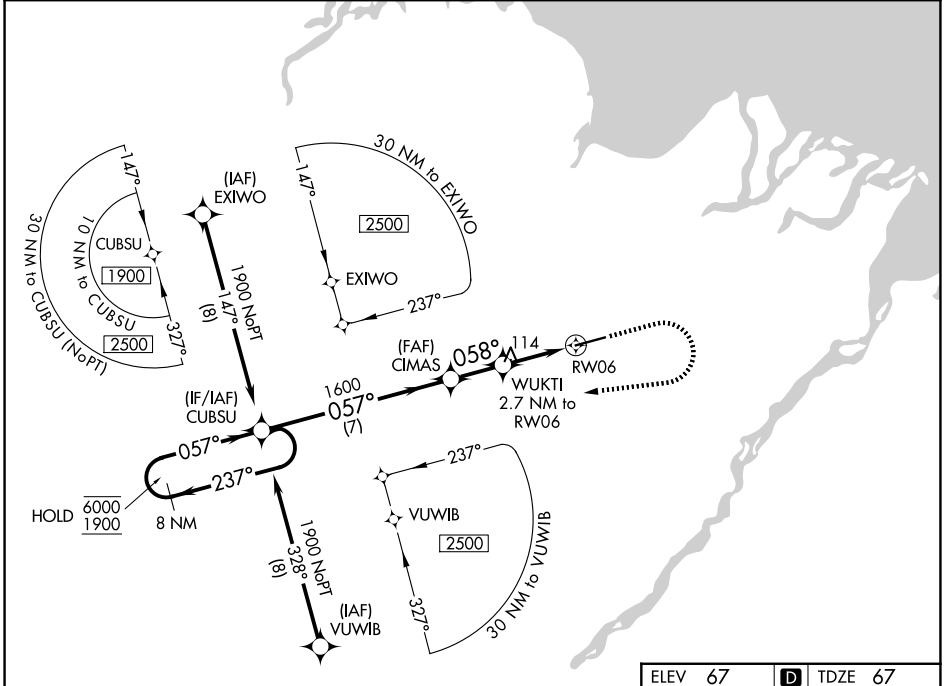

AK, 14 MAY 2026 to 09 JUL 2026

AK, 14 MAY 2026 to 09 JUL 2026

ELEV 67		D TDZE 67			
8 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 50).			
6000 ← 237°		500 1900 CUBSU			
1900 → 057°		* LNAV only.			
GP 3.00° TCH 58		* 0.8 NM to RW06			
7 NM		RW06			
1.9 NM		1.9 NM			
1.9 NM		0.8			
CIRCLING		HIRL Rwy 6-24 0			
CATEGORY	A	B	C	D	E
LPV DA#		267/24	200 (200-½)		
LNAV/VNAV DA		369/24	302 (400-½)		
LNAV MDA		380/24	313 (400-½)		
CIRCLING	540-1	473 (500-1)	580-1½ 513 (600-1½)	620-2	553 (600-2)