

WAAS CH 82412 W27A	APP CRS 271°	Rwy Ldg 5000 TDZE 125 Apt Elev 125
--	------------------------	---

RNAV (GPS) RWY 27R


BARTOW EXEC (BOW)

RNP APCH - GPS.



⚠ Rwy 27R helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using TPA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use TPA altimeter setting and increase LPV DA to 579 feet, LNAV/VNAV DA to 686 feet and all MDA 120 feet. Increase LPV visibility all Cats 3/8 SM, LNAV/VNAV visibility all Cats 1/4 SM, and LNAV visibility Cats C/D 3/8 SM.

MISSED APPROACH: Climb to 2000 direct GUYEQ and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	--	-------------------------	-------------------------

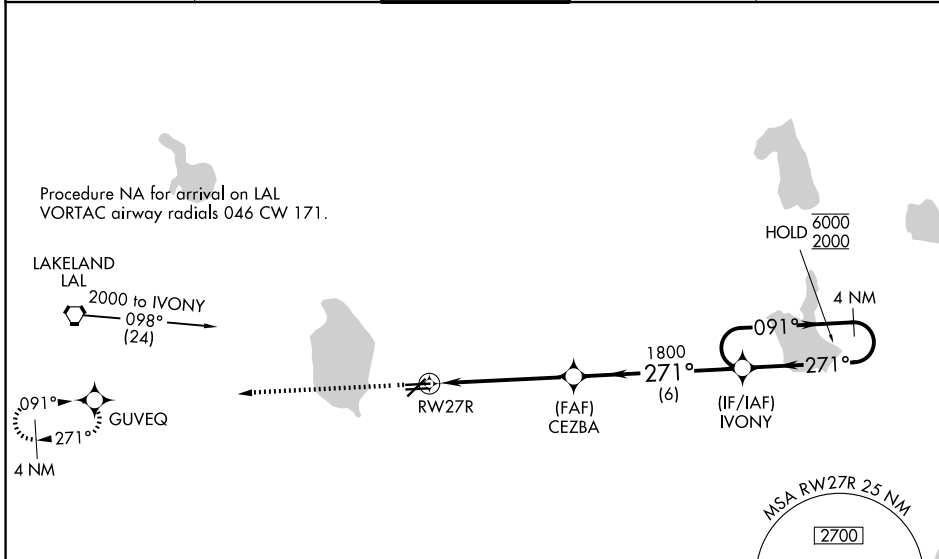

ELEV 125	TDZE 125
----------	----------

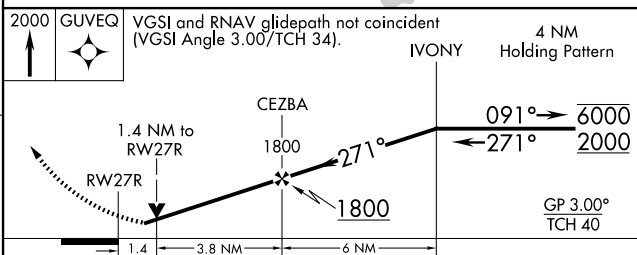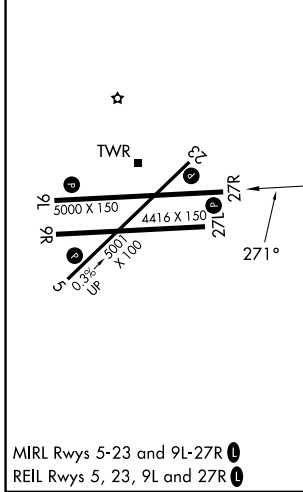

CATEGORY	A	B	C	D
LPV DA		470-1	345 (400-1)	
LNAV/VNAV DA		577-1 ³ / ₈	452 (500-1 ³ / ₈)	
LNAV MDA	600-1	475 (500-1)	600-1 ³ / ₈	475 (500-1 ³ / ₈)

SE-3, 14 MAY 2026 to 11 JUN 2026

SE-3, 14 MAY 2026 to 11 JUN 2026