WAAS CH 90434 W05A	APP CRS 051°	Rwy Ldg 5505 TDZE 1545 Apt Elev 1545

RNAV (GPS) RWY 5
SCOTT MUNI (SCX)

T A NA

Baro-VNAV NA when using Monticello altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 47°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Monticello altimeter setting: increase LPV DA to 2180 feet, LNAV/VNAV DA to 2092 feet and all visibilities ¾ mile; increase all MDA 240 feet and LNAV Cat C visibility ¾ mile and Circling Cat C 1 mile. Night landing: Rwy 5 NA. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4800 direct COPEP and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
135.025	124.625 371.925	122.8 (CTAF) L

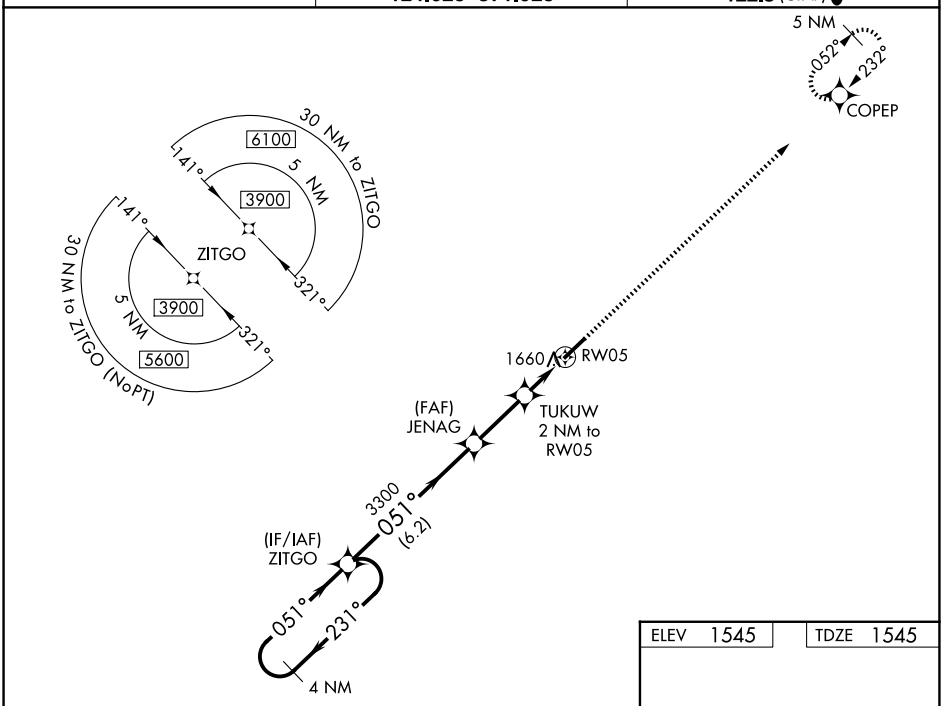

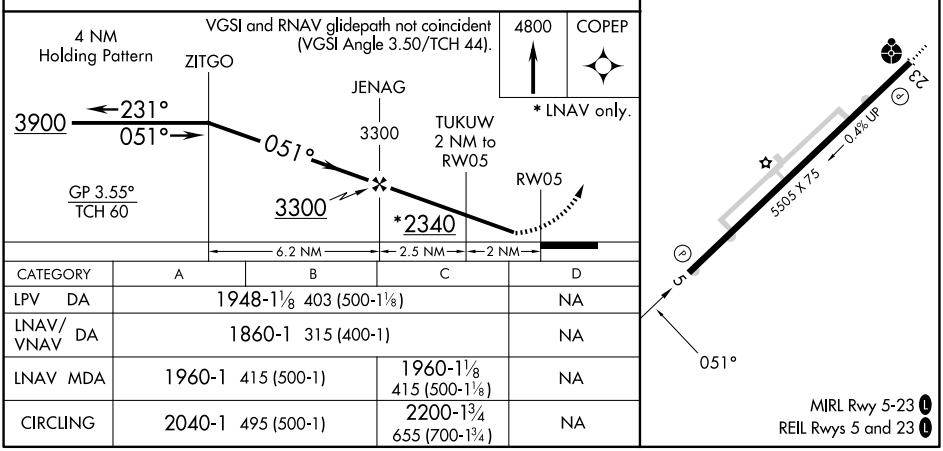

CATEGORY	A	B	C	D
LPV DA	1948-1⅛ 403 (500-1⅛)			NA
LNAV/VNAV DA	1860-1 315 (400-1)			NA
LNAV MDA	1960-1 415 (500-1)		1960-1⅛ 415 (500-1⅛)	NA
CIRCLING	2040-1 495 (500-1)		2200-1¾ 655 (700-1¾)	NA

SE-1, 14 MAY 2026 to 11 JUN 2026
SE-1, 14 MAY 2026 to 11 JUN 2026