



LOC/DME I-LHM <b>108.75</b> Chan <b>24 (Y)</b>	APP CRS <b>151°</b>	Rwy Idg <b>6001</b> TDZE <b>121</b> Apt Elev <b>121</b>
--	------------------------	---

**ILS or LOC RWY 15**  
LINCOLN RGNL/KARL HARDER FLD (LHM)

**NA** When local altimeter setting not received, use Beale AFB altimeter setting and increase DA to 361 feet and all MDAs 40 feet; increase S-LOC 1.5 Cat C/D and Circling Cat D visibility ¼ SM. VDP NA with Beale AFB altimeter setting. WIDBO fix minimums: for inop ALS, increase S-LOC 1.5 Cat D visibility to 1 mile.

**MAISLR** MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct MYV VOR/DME and hold.

AWOS-3 <b>124.25</b>	NORCAL APP CON <b>125.4 259.1</b>	UNICOM <b>123.0 (CTAF)</b>
-------------------------	--------------------------------------	-------------------------------

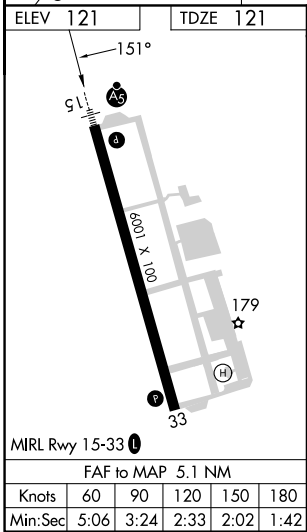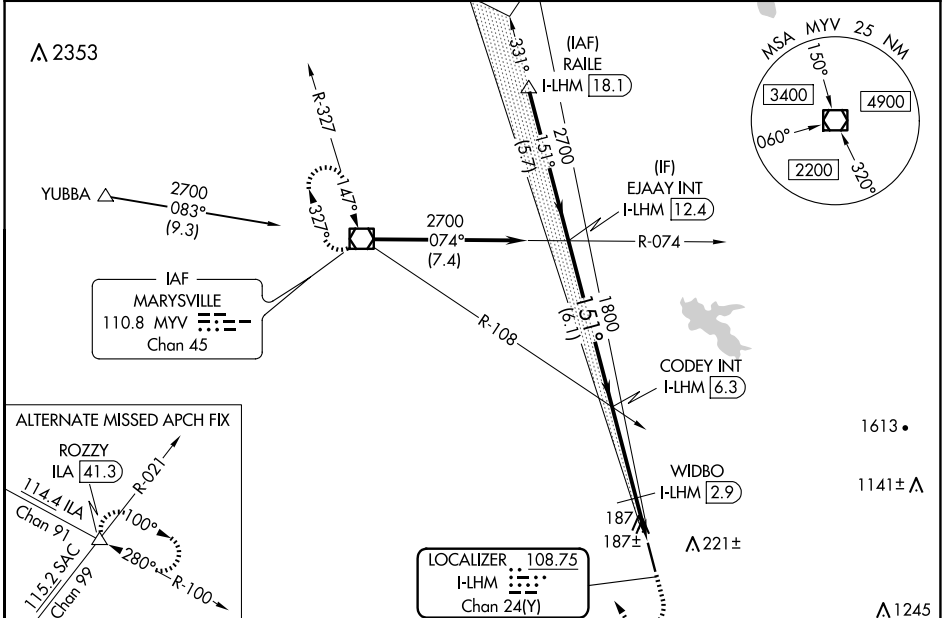

EJAAY INT I-LHM 12.4	CODEY INT I-LHM 6.3	WIDBO I-LHM 2.9	1200	3000	MYV
2700	1800	1800			
GS 3.00° TCH 46	6.1 NM	3.4 NM	0.8 NM	0.9 NM	*LOC only
CATEGORY	A	B	C	D	
S-ILS 15	321-½ 200 (200-½)				
S-LOC 15	600-½	479 (500-½)	600-¾ 479 (500-¾)	600-1 479 (500-1)	
CIRCLING	600-1	479 (500-1)	600-1½ 479 (500-1½)	760-2 639 (700-2)	
WIDBO FIX MINIMUMS					
S-LOC 15	460-½	339 (400-½)	460-¾ 339 (400-¾)		
CIRCLING	520-1 399 (400-1)	580-1 459 (500-1)	600-1½ 479 (500-1½)	760-2 639 (700-2)	

SW-2, 14 MAY 2026 to 11 JUN 2026

SW-2, 14 MAY 2026 to 11 JUN 2026