

WAAS CH <b>50319</b> <b>W27A</b>	APP CRS <b>271°</b>	Rwy Ldg TDZE <b>13</b> Apt Elev <b>13</b>
--	------------------------	---


# RNAV (GPS) RWY 27

FORT LAUDERDALE EXEC (FXXE)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F).  
**⚠** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Lauderdale/Hollywood Intl altimeter setting and increase LPV DA to 414; LNAV/VNAV DA to 468. Increase all MDA 20 feet and increase LPV all Cats and LNAV Cats C/D visibility to 1 $\frac{3}{8}$ . Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. Helicopter visibility reduction below  $\frac{3}{4}$  SM NA.

**MISSED APPROACH:**  
Climb to 2000 direct ENVER and hold.

ATIS <b>119.85</b>	MIAMI APP CON <b>119.7 306.3</b>	EXECUTIVE TOWER <b>120.9 239.3</b>	GND CON <b>121.75</b>
-----------------------	-------------------------------------	---------------------------------------	--------------------------

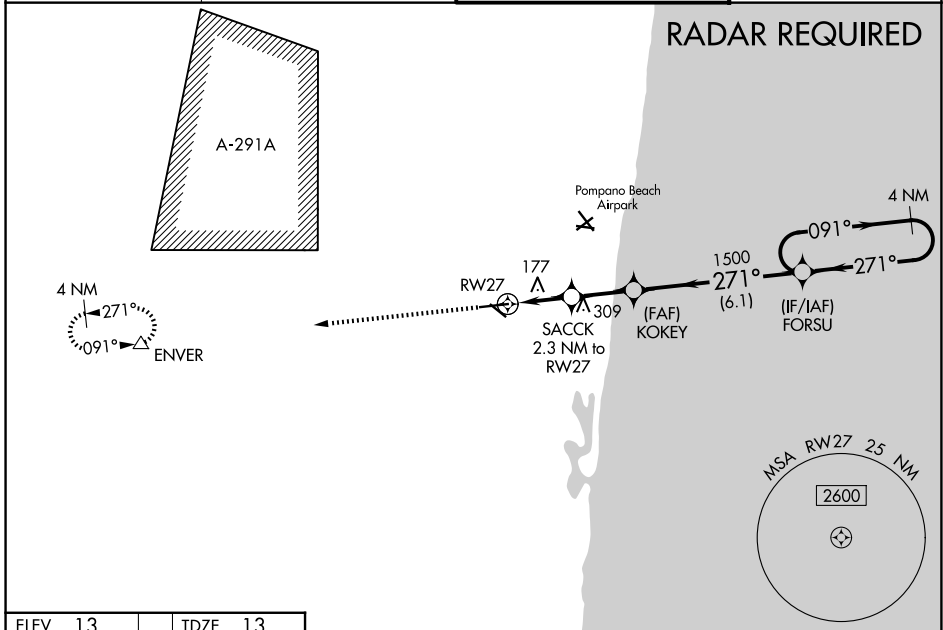


SE-3, 14 MAY 2026 to 11 JUN 2026

SE-3, 14 MAY 2026 to 11 JUN 2026

ELEV 13	TDZE 13
---------	---------

2000 ENVER  
 VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 56).  
 4 NM Holding Pattern FORSU

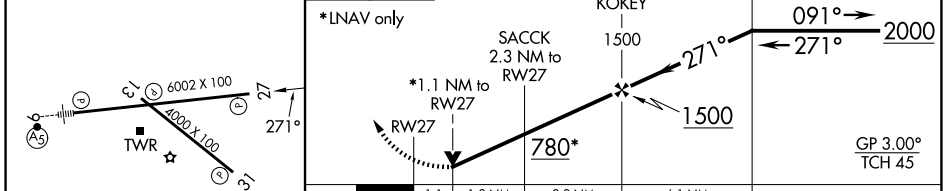

CATEGORY	A	B	C	D
LPV DA	396-1 $\frac{1}{4}$ 383 (400-1 $\frac{1}{4}$ )			
LNAV/VNAV DA	450-1 $\frac{1}{2}$ 437 (500-1 $\frac{1}{2}$ )			
LNAV MDA	440-1 427 (500-1)		440-1 $\frac{1}{4}$ 427 (500-1 $\frac{1}{4}$ )	
CIRCLING	520-1 507 (600-1)	620-1 607 (700-1)	780-2 $\frac{1}{4}$ 767 (800-2 $\frac{1}{4}$ )	780-2 $\frac{1}{2}$ 767 (800-2 $\frac{1}{2}$ )

HIRL Rwy 9-27  
 MIRL Rwy 13-31  
 REL Rwy 13, 27 and 31