

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 72937 W34A | APP CRS 339° | Rwy Ldg TDZE Apt Elev | 5402 204 207 |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 34

HANOVER COUNTY MUNI (OFP)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Richmond Intl altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8 mile. Baro-VNAV and VDP NA when using Richmond Intl altimeter setting.

MISSED APPROACH: Climb to 700 then climb to 2000 direct COATT and hold.

| | | | |
|------------------------|--|--------------------------|---------------------------------|
| ASOS 119.025 | POTOMAC APP CON (001°-185°) 126.4 307.2 (186°-360°) 126.75 307.2 | CLNC DEL 125.4 | UNICOM 122.7 (CTAF) 0 |
|------------------------|--|--------------------------|---------------------------------|

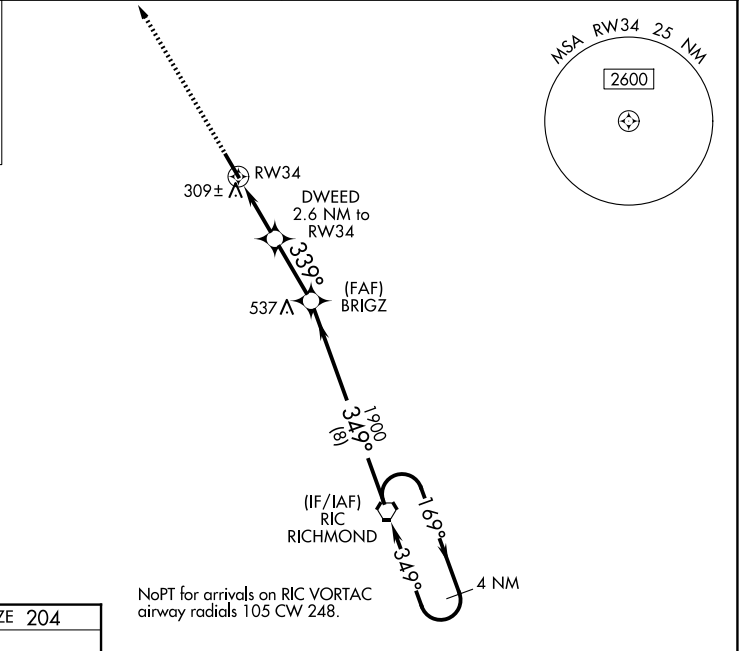

| | |
|----------|----------|
| ELEV 207 | TDZE 204 |
|----------|----------|

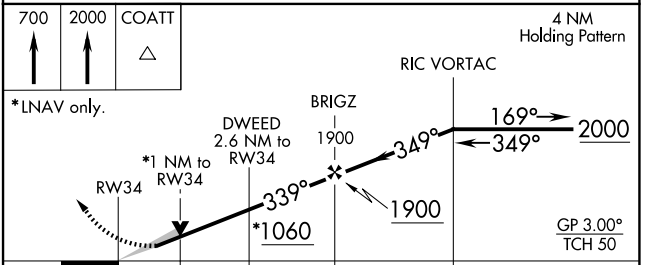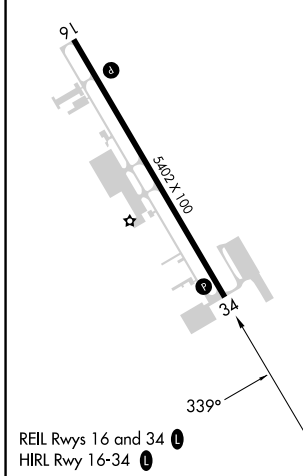

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|----------------------|--|
| LPV DA | | 454-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 493-1 | 289 (300-1) | |
| LNAV MDA | | 560-1 | 356 (400-1) | |
| CIRCLING | 660-1 | 453 (500-1) | 900-2 693 (700-2) | 1020-2 ³ / ₄ 813 (900-2 ³ / ₄) |