WAAS CH 99407 W18B	APP CRS 176°	Rwy Ldg 13400 TDZE 606 Apt Elev 606

RNAV (GPS) RWY 18R
DALLAS-FORT WORTH INTL (DFW)

RADAR required for procedure entry. RNP APCH.

T Simultaneous approach authorized with Rwy 17L/C/R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1¾ SM.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct LIKES and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON
123.775	118.425	126.55 127.5 (E) 124.15 134.9 (W)	121.65 121.8 (E) 121.85 (W)

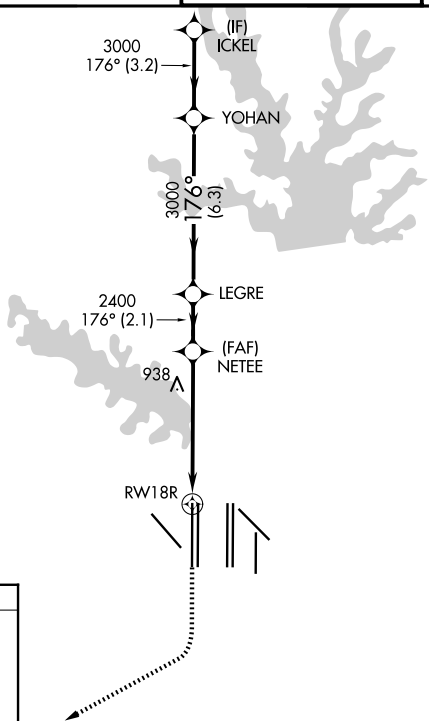

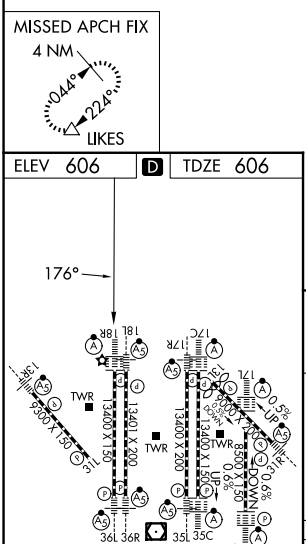
MISSED APCH FIX
4 NM
044°
224°
LIKES
ELEV 606
D
TDZE 606
176°
TWR
13400 X 150
13L 31R
13L 31R
13L 31R