

APP CRS	Rwy Ldg	3500
024°	TDZE	1008
	Apt Elev	1008

RNAV (GPS) RWY 2

POSSUM KINGDOM (F35)

RNP APCH-GPS.

Procedure NA at night. Rwy 2 helicopter visibility reduction below 1 SM NA. Use MWL altimeter setting; when not received, use LUD altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climbing right turn to 3500 direct ZOOOO and hold.



MWL ASOS
135.075

FORT WORTH CENTER
127.0 360.6


CTAF
122.9 0

△ CIYAL

3500
145.0
(14.6)

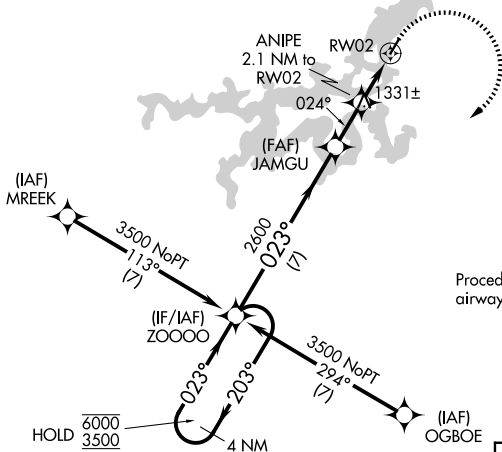

Procedure NA for arrival on MQP VORTAC airway radials 253 CW 330.




HOLD 6000 / 3500 4 NM


ELEV 1008

TDZE 1008

4 NM Holding Pattern VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 33). 3500 ZOOOO

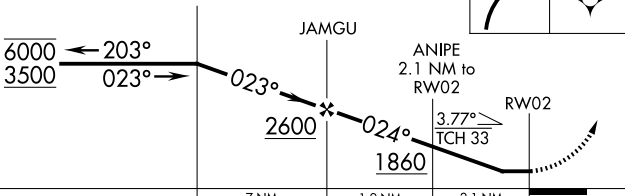

CATEGORY	A	B	C	D
LNAV MDA	1640-1	632 (700-1)	1640-1¼ 632 (700-1¼)	NA
CIRCLING	1700-1 692 (700-1)	1860-1¼ 852 (900-1¼)	1880-2½ 872 (900-2½)	NA

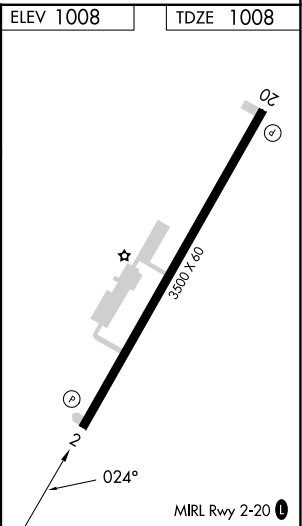

SC-2, 14 MAY 2026 to 11 JUN 2026

SC-2, 14 MAY 2026 to 11 JUN 2026