RNAV (GPS) RWY 34

WADENA MUNI (ADC)

WAAS	APP CRS	Rwy Ldg	4007
CH 70633	339°	TDZE	1364
W34A		Apt Elev	1368

RNP APCH - GPS.

Baro-VNAV and VDP NA when using SAZ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwys 3 and 21. When local altimeter setting not received, use SAZ altimeter setting and increase LPV DA to 1665 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1842 feet and all visibilities ⅛ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3300 direct WENVI and hold.

AWOS-3PT	MINNEAPOLIS CENTER	GCO	UNICOM
118.875	126.1 269.2	121.725	122.8 (CTAF) L

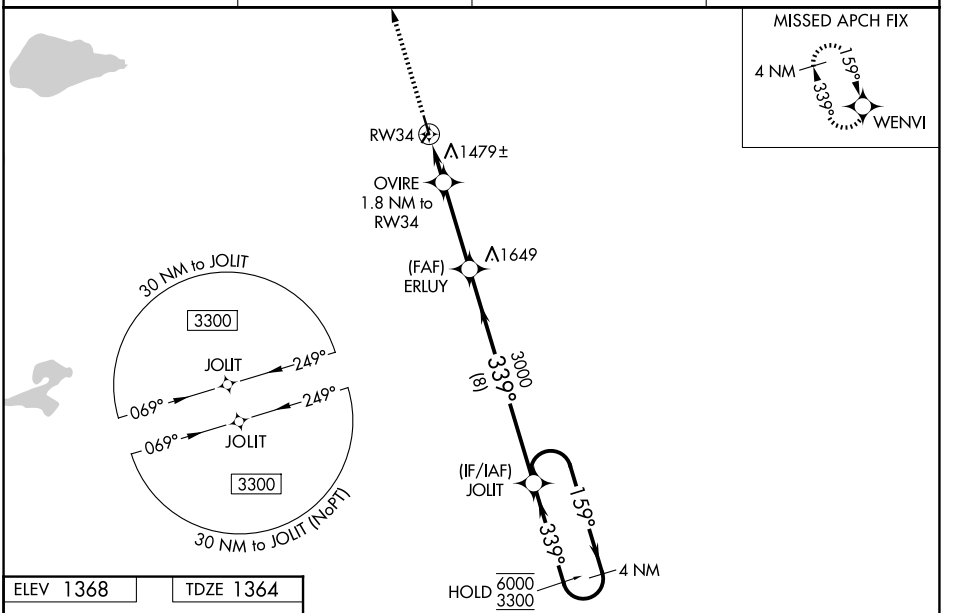

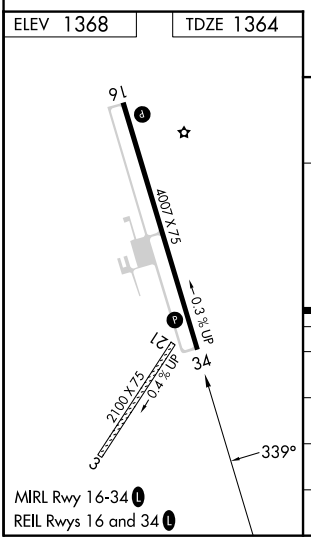

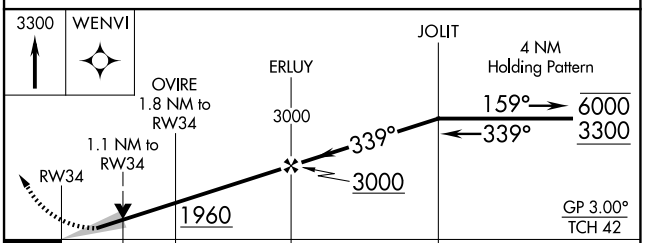

CATEGORY	A	B	C	D
LPV DA	1614-1 250 (300-1)			NA
LNAV/VNAV DA	1791-1½ 427 (500-1½)			NA
LNAV MDA	1740-1 376 (400-1)		1740-1⅛ 376 (400-1⅛)	NA
CIRCLING	1780-1 412 (500-1)	1820-1 452 (500-1)	1940-1½ 572 (600-1½)	NA

NC-1, 14 MAY 2026 to 11 JUN 2026
NC-1, 14 MAY 2026 to 11 JUN 2026