

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>82341</b><br><b>W31A</b> | APP CRS<br><b>313°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>3800</b><br><b>1885</b><br><b>1885</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 31

ONIDA MUNI (98D)



**▽** DME/DME RNP-0.3 NA. VDP NA when using Pierre altimeter setting. When local altimeter setting not received, use Pierre altimeter setting: increase all MDAs 80 feet and LP Cat C visibility 1/8 SM and LNAV and Circling Cat C visibility 1/4 SM.

**▲** NA MISSED APPROACH: Climb to 4100 direct WUKVA and hold.

|                         |  |                        |
|-------------------------|--|------------------------|
| AWOS-3P<br><b>120.0</b> | MINNEAPOLIS CENTER<br><b>125.1 269.1</b> | CTAF<br><b>122.9 0</b> |
|-------------------------|--|------------------------|

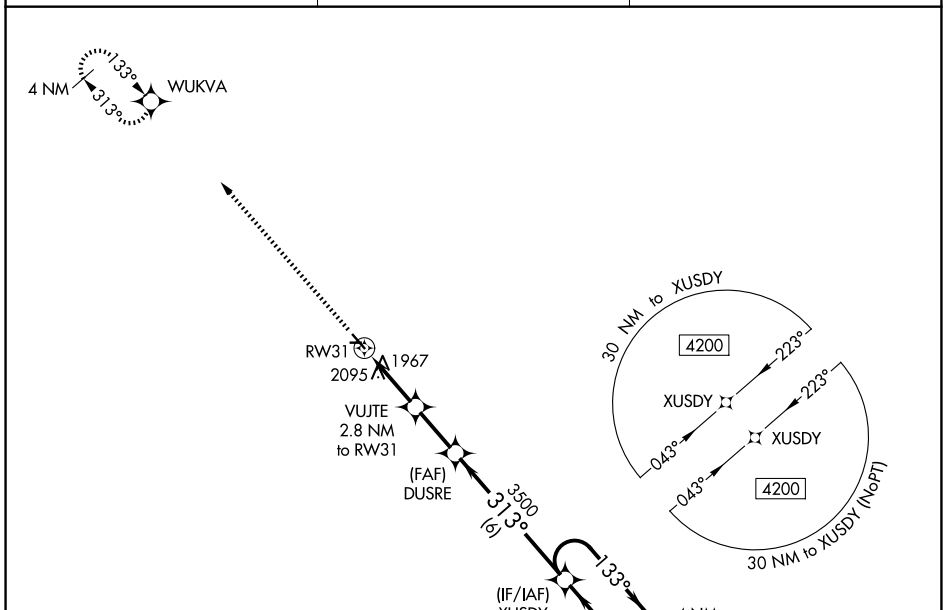

|           |           |
|-----------|-----------|
| ELEV 1885 | TDZE 1885 |
|-----------|-----------|

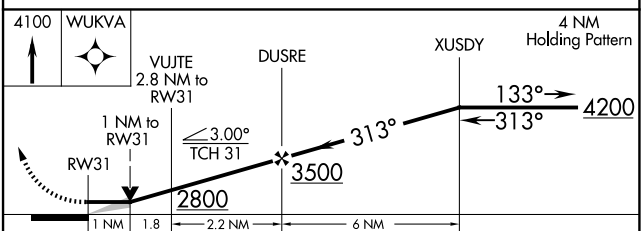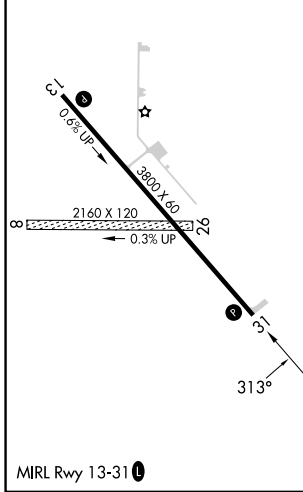

| CATEGORY | A                  | B           | C  | D  |
|----------|--------------------|-------------|--|----|
| LP MDA   | 2220-1 335 (400-1) |             |  | NA |
| LNAV MDA | 2360-1             | 475 (500-1) | 2360-1 <sup>3</sup> / <sub>8</sub><br>475 (500-1 <sup>3</sup> / <sub>8</sub> ) | NA |
| CIRCLING | 2400-1             | 515 (600-1) | 2520-1 <sup>3</sup> / <sub>4</sub><br>635 (700-1 <sup>3</sup> / <sub>4</sub> ) | NA |

NC-1, 14 MAY 2026 to 11 JUN 2026

NC-1, 14 MAY 2026 to 11 JUN 2026