




| | | |
|--|------------------------|---|
| WAAS CH 53532 W36A | APP CRS 002° | Rwy Ldg 5003 TDZE 235 Apt Elev 239 |
|--|------------------------|---|

RNAV (GPS) RWY 36


DELTA RGNL (DRP)

| | | |
|-----------------|---|--|
| RNP APCH - GPS. | <p>Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting; increase LPV DA to 503 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 755 feet; increase all MDAs 80 feet.</p> | <p>MISSED APPROACH: Climb to 3000 direct UHIMI and hold, continue climb-in-hold to 3000.</p> |
|-----------------|---|--|

| | | |
|-------------------------|--------------------------------------|-------------------------------|
| AWOS-3P 120.0 | MEMPHIS CENTER 135.3 335.8 | UNICOM 123.0 (CTAF) |
|-------------------------|--------------------------------------|-------------------------------|

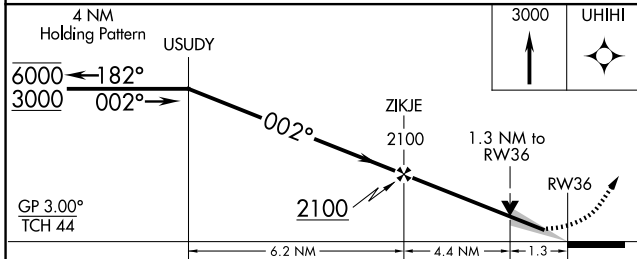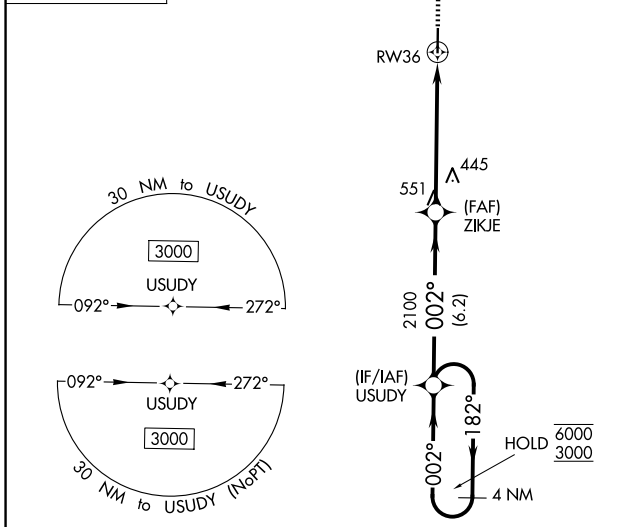

| | |
|-----------------------------------|----------|
| ELEV 239 | TDZE 235 |
| HIRL Rwy 18-36 REL Rwy 18 & 36 | |

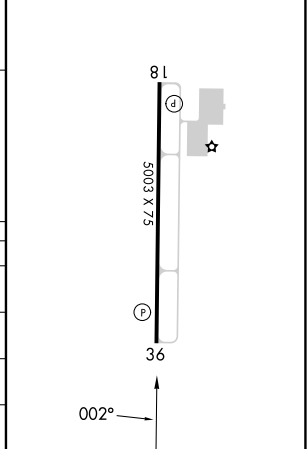

| CATEGORY | A | B | C | D |
|--------------|--------|--------------|---|----|
| LPV DA | 435-¾ | 200 (200-¾) | | NA |
| LNAV/VNAV DA | 687-1⅜ | 452 (500-1⅜) | | NA |
| LNAV MDA | 700-1 | 465 (500-1) | | NA |
| CIRCLING | 760-1 | 521 (600-1) | | NA |

SC-1, 14 MAY 2026 to 11 JUN 2026

SC-1, 14 MAY 2026 to 11 JUN 2026