RNAV (GPS) RWY 35

SIOUX COUNTY RGNL (SXK)

WAAS	APP CRS		
CH **93742**	**353°**	Rwy Ldg	**5500**
W35A		TDZE	**1409**
		Apt Elev	**1409**

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using LRJ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LRJ altimeter setting: increase LPV DA to 1668 feet; increase LNAV/VNAV DA to 1718 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to ⅞ SM. For inop ALS when using LRJ altimeter setting, increase LNAV/VNAV all Cats visibility to ⅞ SM, and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 4500 direct HALGA and hold, continue climb-in-hold to 4500.

AWOS-3P	SIOUX CITY APP CON ★	UNICOM
120.075	**124.6 307.0**	**122.7** (CTAF) L

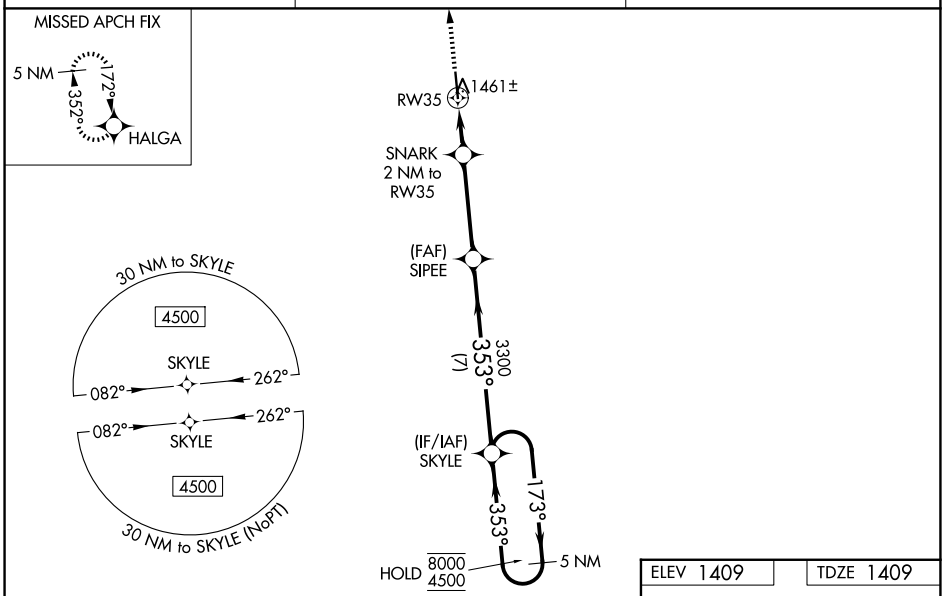

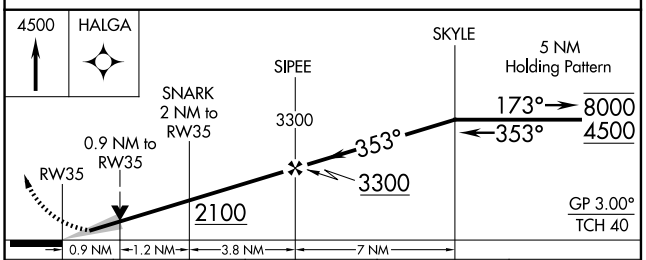

CATEGORY	A	B	C	D
LPV DA	1609-½	200 (200-½)		
LNAV/VNAV DA	1659-½	250 (300-½)		
LNAV MDA	1720-½	311 (400-½)		
CIRCLING	1820-1 411 (500-1)	2080-1 671 (700-1)	2080-2 671 (700-2)	2080-2¼ 671 (700-2¼)

ELEV 1409 TDZE 1409

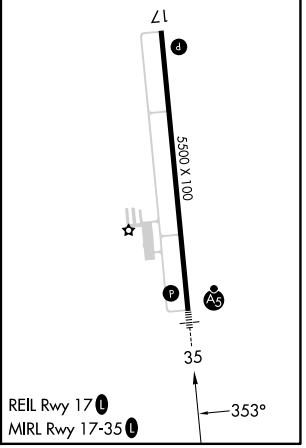

NC-3, 14 MAY 2026 to 11 JUN 2026
NC-3, 14 MAY 2026 to 11 JUN 2026