

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 82319 W31A | APP CRS 310° | Rwy Ldg TDZE Apt Elev | 7901 3601 3607 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) Y RWY 31

RICK HUSBAND AMARILLO INTL (AMA)

ASR **▼** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 46°C (116°F). When local altimeter setting not received, use Borger altimeter setting; increase DA to 4004 and all visibilities 5/8 mile; increase all MDA 160 feet and visibility Cat C and D 1/2 mile. Baro-VNAV and VDP NA when using Borger altimeter setting.

MISSED APPROACH: Climb to 6100 direct MOVEO and on track 317° to LANIT and hold.



| | | | | | |
|-----------------------------|---|---|-------------------------------|-----------------------------------|-------------------------|
| ATIS 118.85 350.3 | AMARILLO APP CON* 119.5 307.0 | AMARILLO TOWER* 118.3(CTAF) 257.9 | GND CON 121.9 348.6 | CLNC DEL 121.65 239.275 | UNICOM 122.95 |
|-----------------------------|---|---|-------------------------------|-----------------------------------|-------------------------|

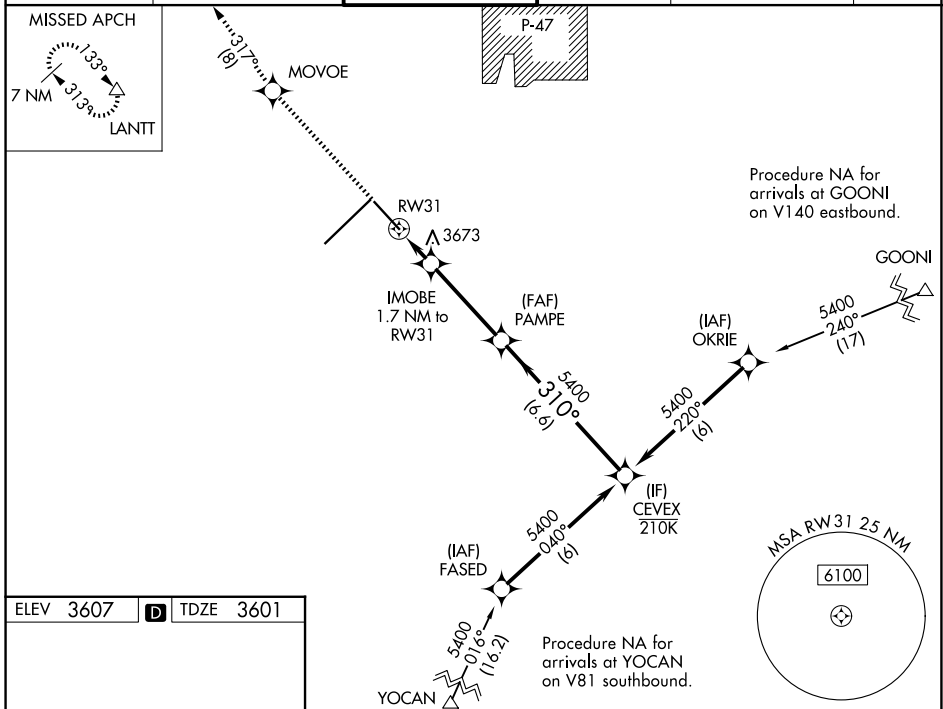

Procedure NA for arrivals at GOONI on V140 eastbound.

Procedure NA for arrivals at YOCAN on V81 southbound.

| | | |
|-----------|----------|-----------|
| ELEV 3607 | D | TDZE 3601 |
|-----------|----------|-----------|

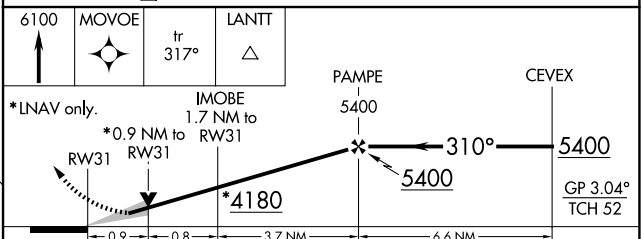

| CATEGORY | A | B | C | D |
|--------------|--------|-------------|-------------------------------|-------------------------------|
| LPV DA | | 3851-3/4 | 250 (300-3/4) | |
| LNAV/VNAV DA | | 3851-3/4 | 250 (300-3/4) | |
| LNAV MDA | | 3940-1 | 339 (400-1) | |
| CIRCLING | 4080-1 | 473 (500-1) | 4240-1 3/4 633 (700-1 3/4) | 4280-2 1/4 673 (700-2 1/4) |

SC-2, 11 JUN 2026 to 09 JUL 2026

SC-2, 11 JUN 2026 to 09 JUL 2026