
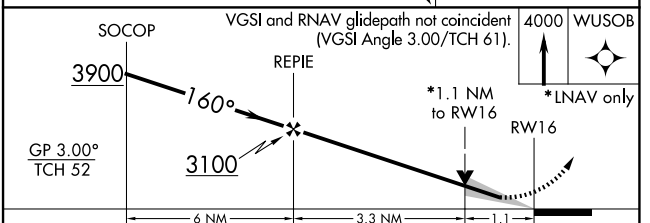
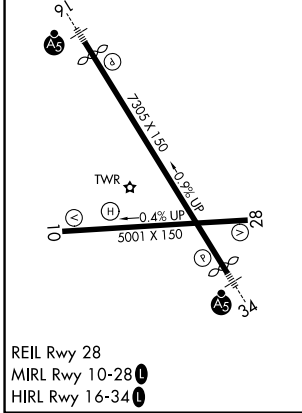


WAAS CH 66015 W16A	APP CRS 160°	Rwy Ldg TDZE Apt Elev	6905 1634 1636
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 16

GREATER BINGHAMTON/EDWIN A LINK FLD (BGM)

RNP APCH.				MALSRR	MISSED APPROACH: Climb to 4000 direct WUSOB and hold.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500.					
ATIS 128.15	BINGHAMTON APP CON * 118.6 257.625	BINGHAMTON TOWER * 119.3 (CTAF) 239.25	GND CON 121.9	CLNC DEL 125.05	UNICOM 122.95

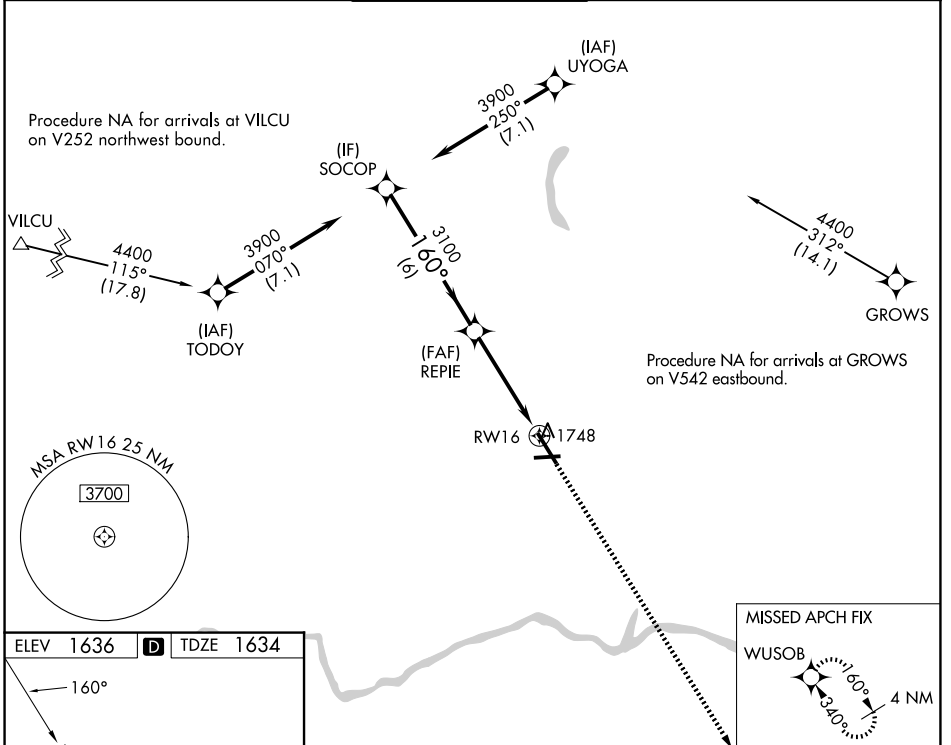

CATEGORY	A	B	C	D
LPV DA	1884/24 250 (300-1/2)			
LNAV/VNAV DA	1984/30 350 (400-3/8)			
LNAV MDA	2060/24	426 (500-1/2)	2060/40	426 (500-3/4)
CIRCLING	2120-1	484 (500-1)	2120-1 1/2	2200-2
			484 (500-1 1/2)	564 (600-2)

NE-2, 11 JUN 2026 to 09 JUL 2026

NE-2, 11 JUN 2026 to 09 JUL 2026