| WAAS CH 86220 W27A | APP CRS 276° | Rwy Ldg 8708 TDZE 635 Apt Elev 645 |
|---|---|---|

# RNAV (GPS) RWY 27R

## DETROIT METRO WAYNE COUNTY (DTW)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct KUPNE and hold, continue climb-in-hold to 4000.

| D-ATIS | DETROIT APP CON | METRO TOWER | GND CON |
|---|---|---|---|
| 133.675 | 125.15 284.0 | 118.4 317.725 | 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE) |

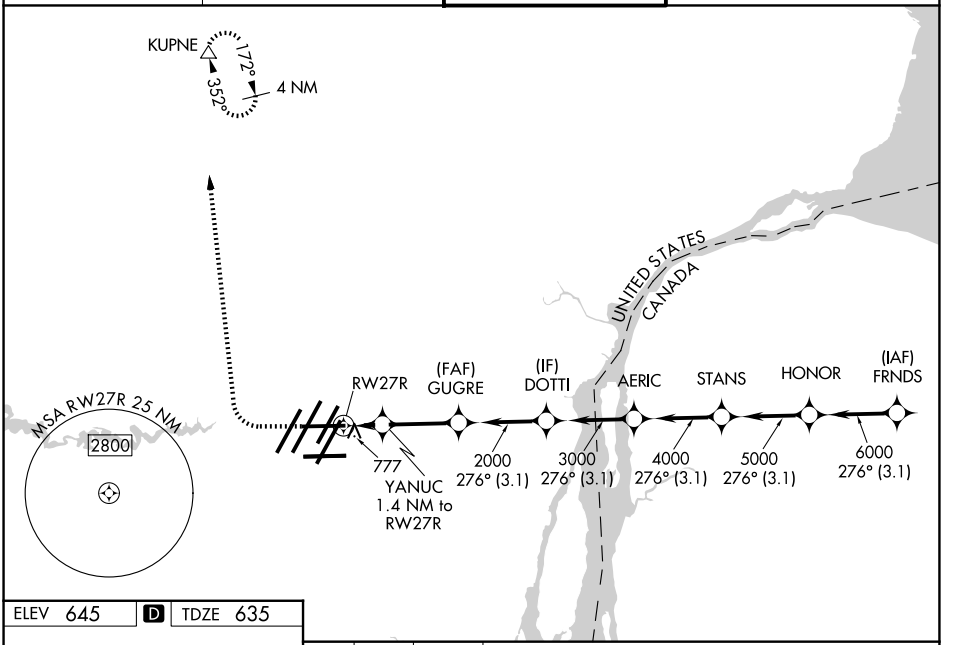


ELEV 645 D TDZE 635




TDZL/RCLS Rwys 3R, 4L, 4R and 22R
REIL Rwys 3L, 9L, 9R and 21R
HIRL all Rwys

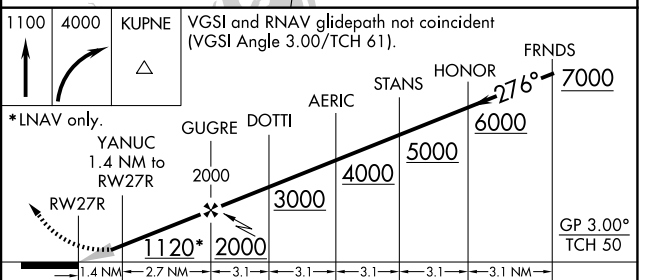


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA** | 835/24 200 (200-½) | | | |
| LNAV/VNAV DA | 938/24 303 (300-½) | | | |
| LNAV MDA | 1040/24 405 (400-½) | | 1040/40 405 (400-¾) | |
| CIRCLING | 1180-1 535 (600-1) | | 1180-1½ 535 (600-1½) | 1240-2 595 (600-2) |



EC-1, 11 JUN 2026 to 09 JUL 2026
EC-1, 11 JUN 2026 to 09 JUL 2026