WAAS	APP CRS	Rwy Ldg 11245
CH 70643	273°	TDZE 653
W27D		Apt Elev 680

RNAV (GPS) RWY 27C
CHICAGO O'HARE INTL (ORD)

RNP APCH.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct UKUNE and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR NORTH)	(TWR SOUTH)	(ALL TWRS)	(TWR CENTER) (OBND)	(IBND)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	121.15 348.0	124.125	118.05	226.675	121.75	121.9	121.6	

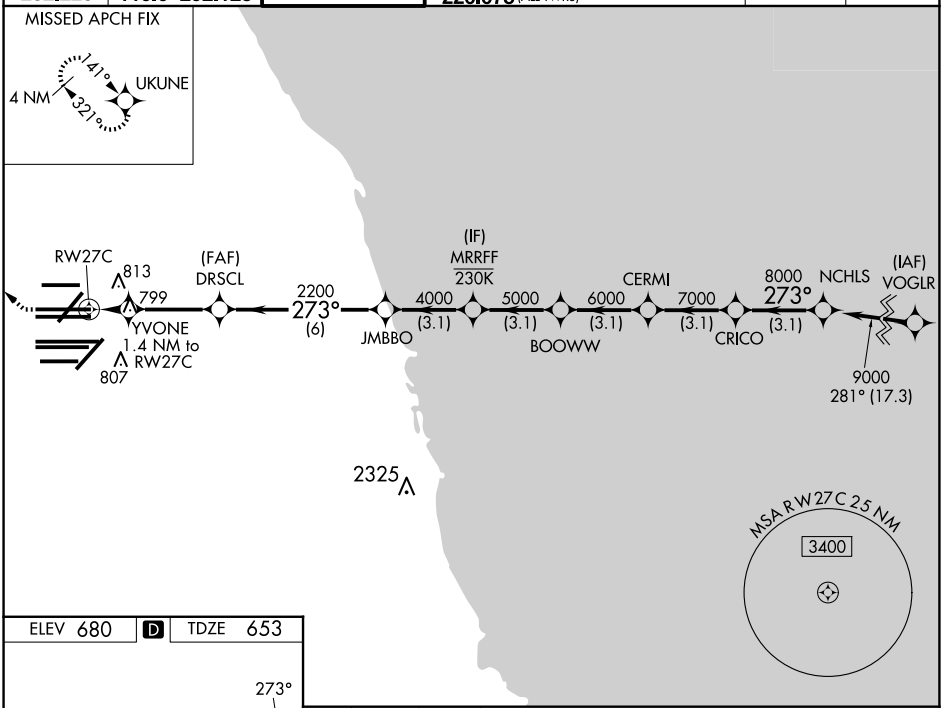

ELEV 680 D TDZE 653

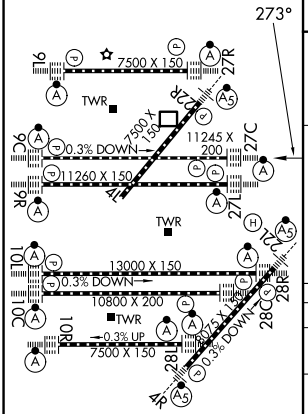

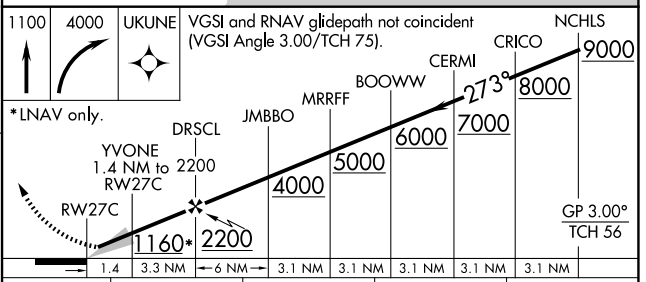

CATEGORY	A	B	C	D
LPV DA	853/18 200 (200-½)			
LNAV/VNAV DA	1086/40 433 (500-¾)			
LNAV MDA	1060/24 407 (400-½)		1060/40 407 (400-¾)	

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026