RNAV (GPS) RWY 9C

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	11245
CH 58143	093°	TDZE	673
W09D		Apt Elev	680

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all cats visibility to RVR 4500 and LNAV Cat C/D to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DEERE and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	121.15 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	





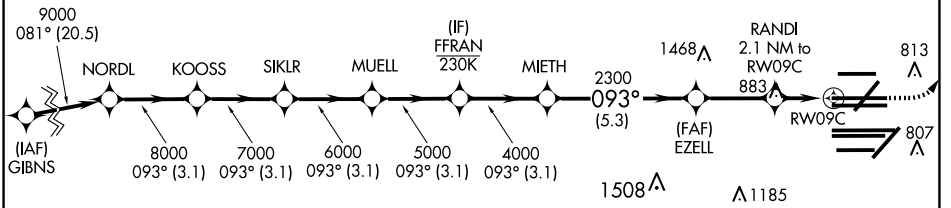

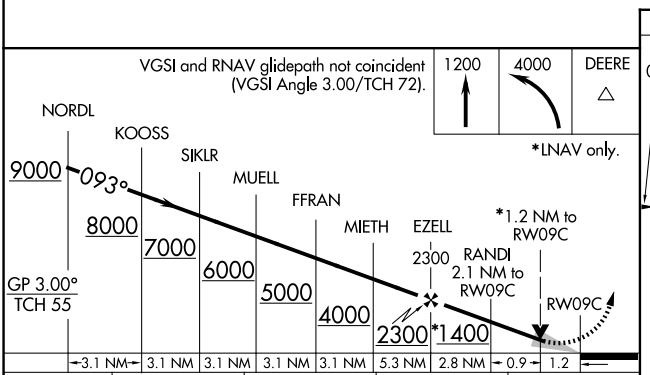

CATEGORY	A	B	C	D
LPV DA		873/18	200 (200-½)	
LNAV/VNAV DA		976/24	303 (300-½)	
LNAV MDA	1140/24	467 (500-½)	1140/50	467 (500-1)

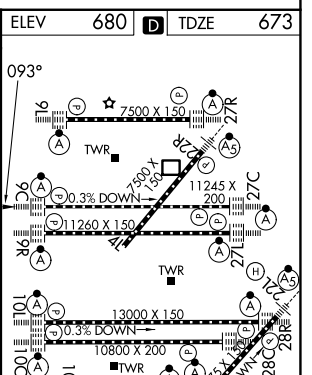

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026