WAAS CH 77937 W10D	APP CRS 090°	Rwy Ldg 7500 TDZE 680 Apt Elev 680

RNAV (GPS) Y RWY 10R
CHICAGO O'HARE INTL (ORD)

RNP APCH.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
LNAV procedure NA during simultaneous operations.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON		(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)		121.75 (OBND) 121.9 (IBND)	121.6	

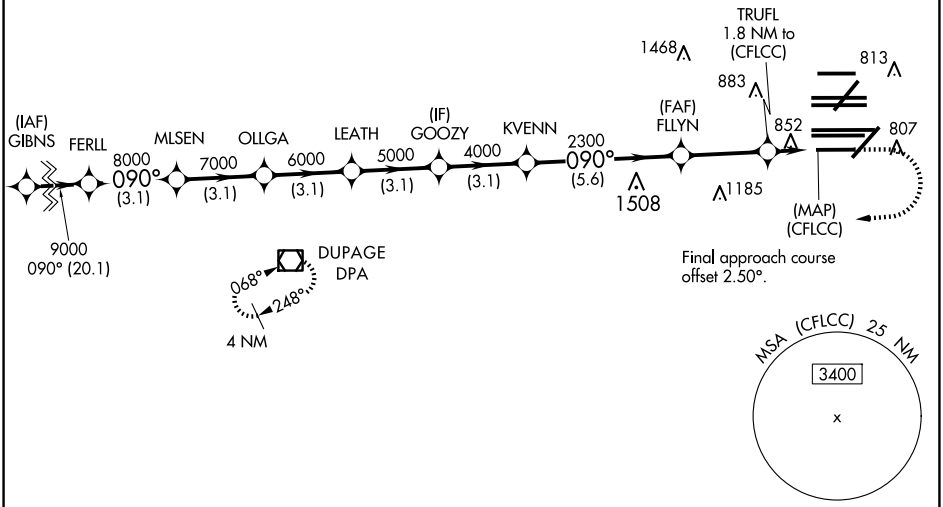

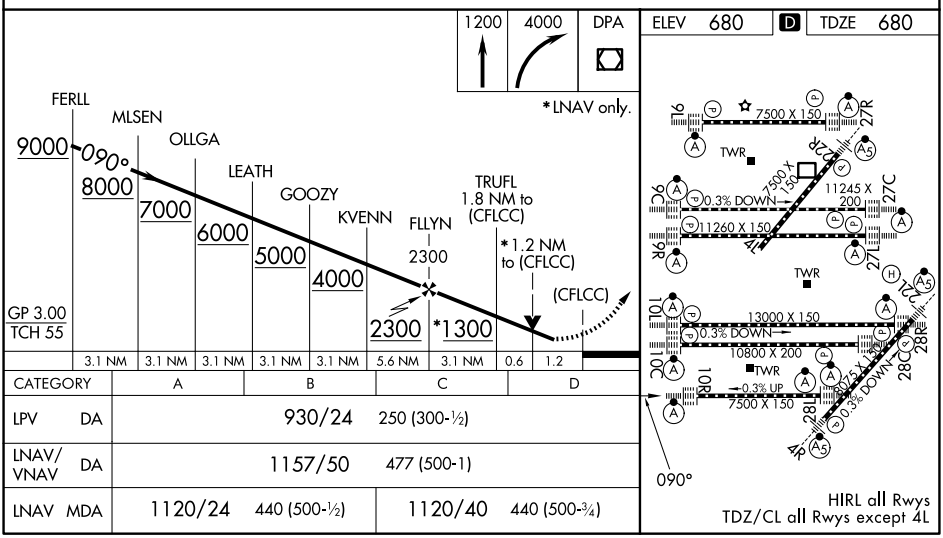

CATEGORY	A	B	C	D
LPV DA	930/24 250 (300-½)			
LNAV/VNAV DA	1157/50 477 (500-1)			
LNAV MDA	1120/24 440 (500-½)		1120/40 440 (500-¾)	

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026