

| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 97629 W35A | APP CRS 354° | Rwy Ldg TDZE Apt Elev | 9001 28 33 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 35L




ELLINGTON (EFD)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Circling NA west of Rwy 17R-35L. DME/DME RNP-0.3 NA. For inop MALSF, increase LNAV/VNAV all Cats visibility to 1½ mile, and LNAV Cats A and B visibility to 1 mile and Cats C, D and E visibility to 1½ mile. Inop table does not apply to LPV.

MALSF

MISSED APPROACH: Climb to 1500 then climbing right turn to 3100 direct WATFO and hold.

| | | | |
|------------------------------|--|--|-------------------------------|
| ATIS 135.575 269.9 | HOUSTON APP CON 134.45 284.0 | ELLINGTON TOWER 126.05 253.5 | GND CON 121.6 275.8 |
|------------------------------|--|--|-------------------------------|

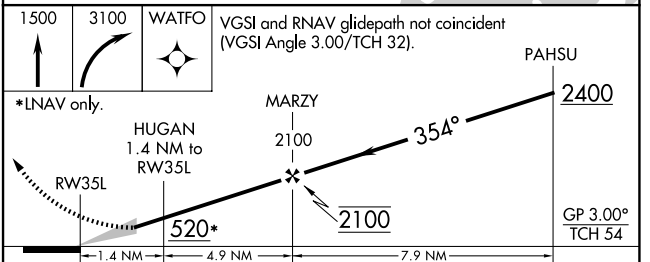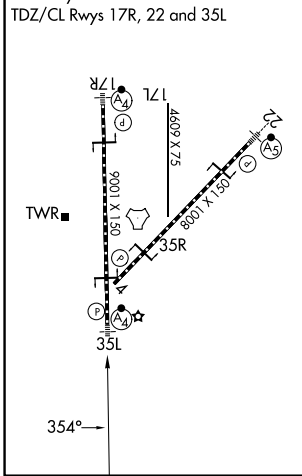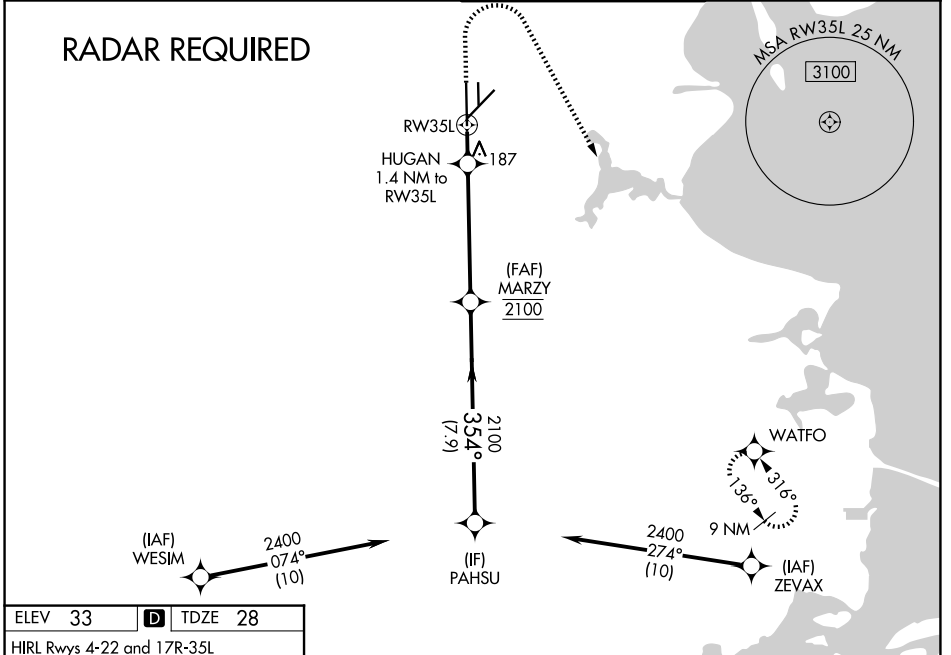

| CATEGORY | A | B | C | D | E |
|--------------|--------|-------------|------------------------|----------------------|------------------------|
| LPV DA | | 228/40 | 200 (200-¾) | | |
| LNAV/VNAV DA | | 499/60 | 471 (500-1¼) | | |
| LNAV MDA | 440/40 | 412 (500-¾) | 440/50 | 412 (500-1) | |
| CIRCLING | 500-1 | 468 (500-1) | 580-1½ 547 (600-1½) | 640-2 607 (700-2) | 700-2¼ 667 (700-2¼) |

SC-5, 11 JUN 2026 to 09 JUL 2026

SC-5, 11 JUN 2026 to 09 JUL 2026