

MIAMI, FLORIDA

AL-257 (FAA)

25275

WAAS CH 86903 W26A	APP CRS 272°	Rwy Ldg 8600 TDZE 9 Apt Elev 9
--	------------------------	---


RNAV (GPS) RWY 26R

MIAMI INTL (MIA)


RNP APCH - GPS. MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)	348.6
-------------------------	--------------------------------------	-----------------------------------	--	--------------

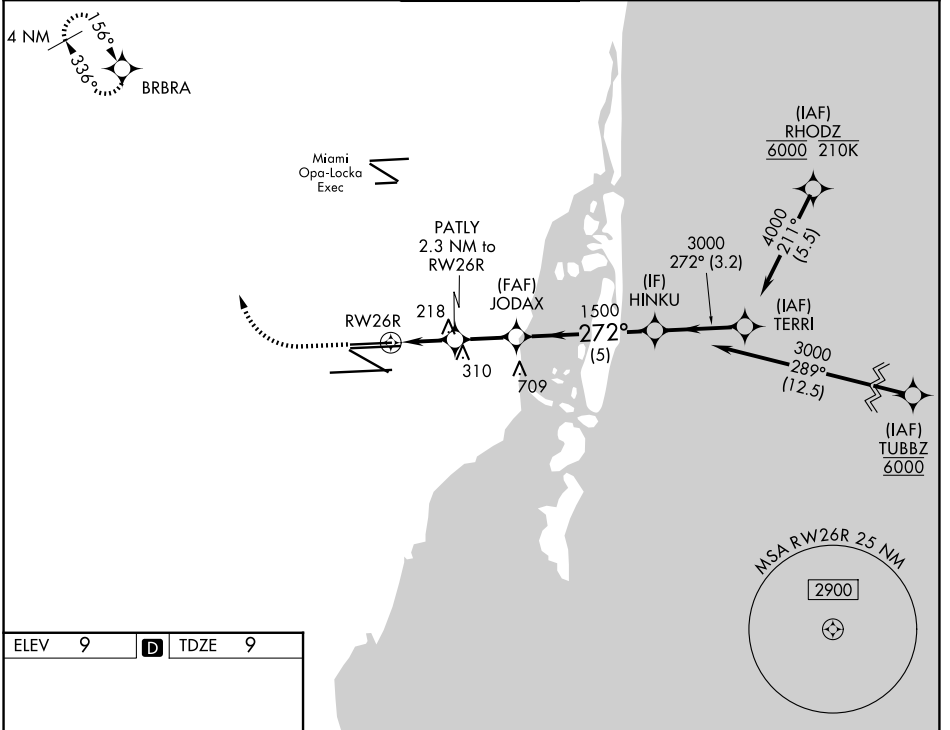

ELEV 9	D	TDZE 9
--------	----------	--------

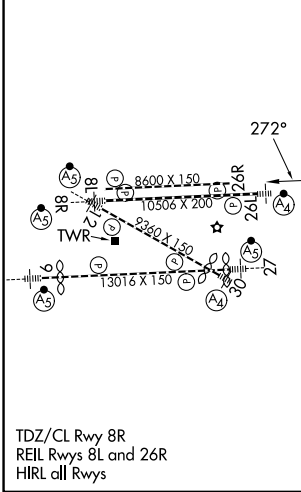

800	4000	BRBRA			
PATLY 2.3 NM to RWY26R		JODAX 1500	HINKU 3000	TERRI 4000	GP 3.00° TCH 60
1.3 NM to RWY26R		1.3 NM	2.2 NM	5 NM	3.2 NM
CATEGORY	A	B	C	D	
LPV	DA	265-3/4	256 (300-3/4)		
LNAV/VNAV	DA	432-1 1/4	423 (500-1 1/4)		
LNAV MDA		480-1	471 (500-1)	480-1 3/8	471 (500-1 3/8)

MIAMI, FLORIDA
Amdt 5 14JUL22

25°48'N-80°17'W

MIAMI INTL (MIA) RNAV (GPS) RWY 26R

SE-3, 11 JUN 2026 to 09 JUL 2026

SE-3, 11 JUN 2026 to 09 JUL 2026