RNAV (GPS) Z RWY 8L

MIAMI INTL (MIA)

WAAS CH 42703 W08A	APP CRS 092°	Rwy Ldg 8600	TDZE 9	Apt Elev 9

RNP APCH - GPS.

T Rwy 8L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON
119.15	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6

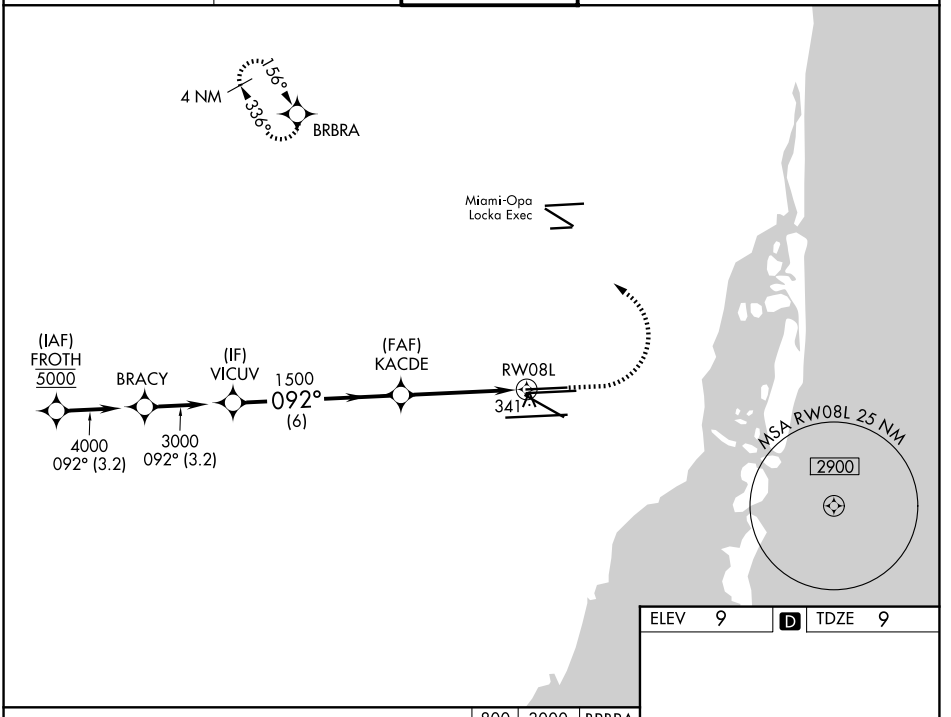

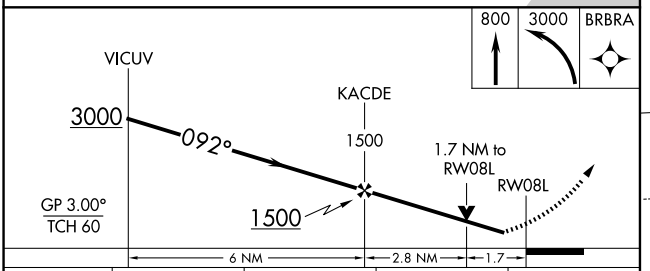

CATEGORY	A	B	C	D
LPV DA	279-7/8	270 (300-7/8)		
LNAV/VNAV DA	513-1 3/8	504 (600-1 3/8)		
LNAV MDA	600-1	591 (600-1)	600-1 3/4	591 (600-1 3/4)

ELEV 9 D TDZE 9



TDZL/RCLS Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

SE-3, 11 JUN 2026 to 09 JUL 2026
SE-3, 11 JUN 2026 to 09 JUL 2026