



WAAS CH 72931 W04A	APP CRS 045°	Rwy Ldg 9456 TDZE 832 Apt Elev 842
--	------------------------	---

RNAV (GPS) RWY 4


MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct GEP VORTAC and hold.
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1 3/8 SM, LNAV Cat C/D/E visibility to 1 3/8 SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

D-ATIS 135.35 239.275	MINNEAPOLIS APP CON 118.725 335.65 (35) 119.3 335.65 (12L-30R, 4-22, 17) 126.95 335.65 (12R-30L)	MINNEAPOLIS TOWER 123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (12R-30L, 4-22)	GND CON 121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)
---------------------------------	--	---	---

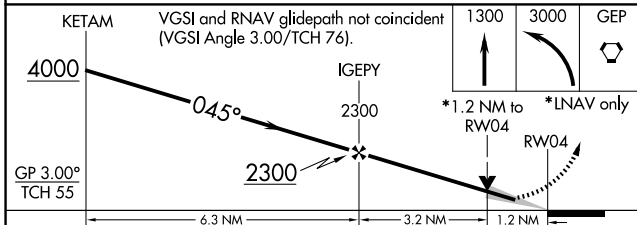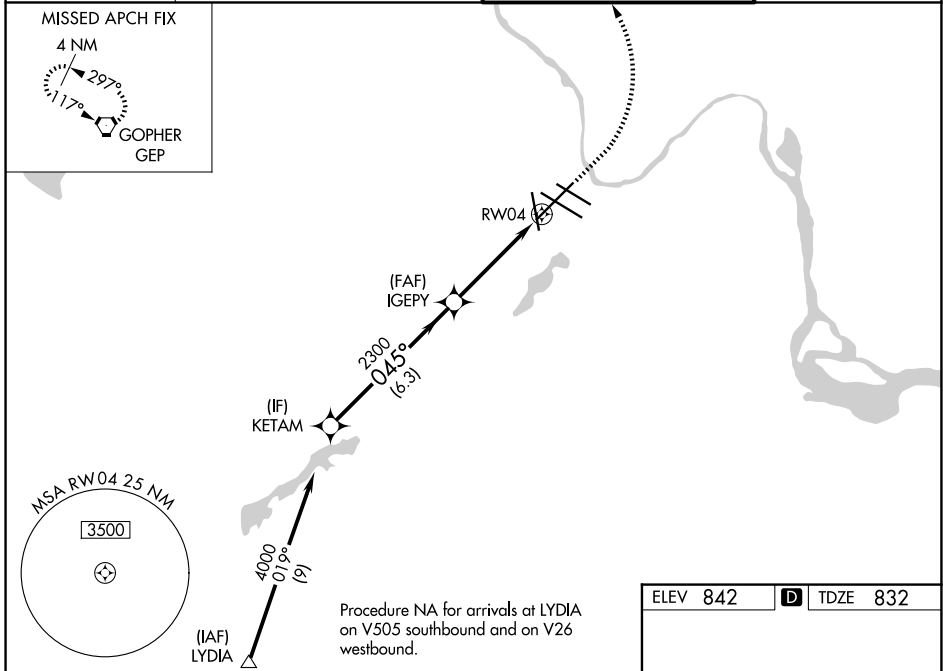

ELEV 842	D TDZE 832
----------	-------------------

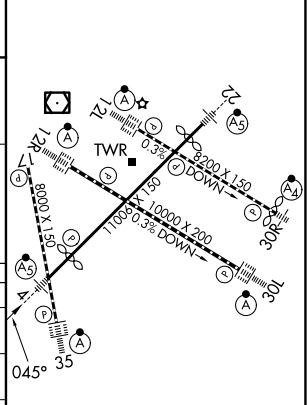

CATEGORY	A	B	C	D	E
LPV DA#	1032/24		200 (200-1/2)		
LNAV/VNAV DA	1281/45		449 (500-7/8)		
LNAV MDA	1300/24	468 (500-1/2)	1300/50	468 (500-1)	
CIRCLING	1360-1	518 (600-1)	1460-1 3/4 618 (700-1 3/4)	1660-2 3/4 818 (900-2 3/4)	1800-3 958 (1000-3)

HIRL all rwys
REIL Rwy 17
TDZL/RCLS Rwy 12L, 12R, 30L, and 35

RNAV (GPS) RWY 4

NC-1, 11 JUN 2026 to 09 JUL 2026

NC-1, 11 JUN 2026 to 09 JUL 2026