




WAAS CH 69306 W33A	APP CRS 327°	Rwy Ldg TDZE Apt Elev	8502 219 219
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 33

MOBILE RGNL (MOB)

RNP APCH - GPS.	MALSRL 	MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct SQWID and hold.
ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cots visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 124.75 257.85	MOBILE APP CON ★ 118.5 269.3	MOBILE TOWER ★ 118.3 (CTAF) 239.0	GND CON 121.9 348.6	UNICOM 122.95
------------------------------	--	---	-------------------------------	-------------------------

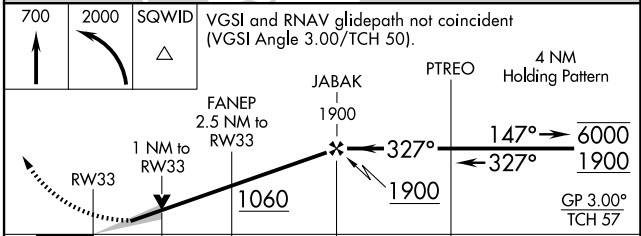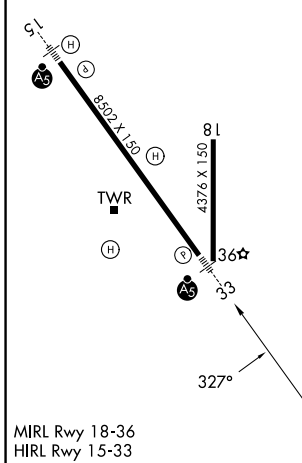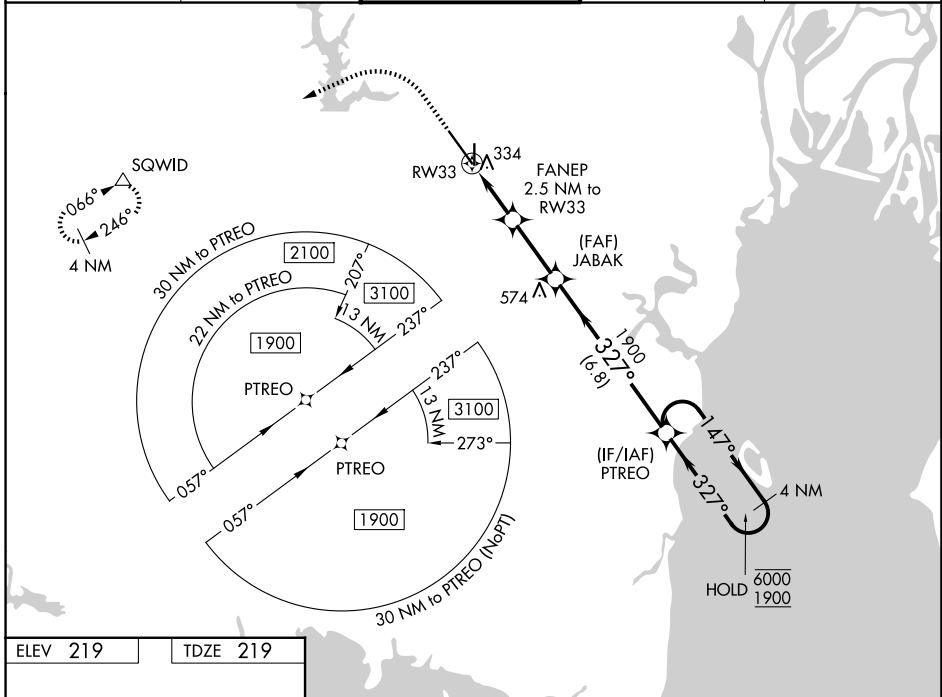

CATEGORY	A	B	C	D
LPV DA *		419/24	200 (200-½)	
LNAV/VNAV DA		505/24	286 (300-½)	
LNAV MDA	600/24	381 (400-½)	600/35	381 (400-¾)
CIRCLING	680-1	461 (500-1)	740-1½ 521 (600-1½)	780-2 561 (600-2)