WAAS	APP CRS	Rwy Ldg	5648
CH 86734	093°	TDZE	798
W09A		Apt Elev	809

RNAV (GPS) RWY 9

WITTMAN RGNL (OSH)

RNP APCH - GPS.

Rwy 9 helicopter visibility reduction below ¾ SM NA. Circling Rwy 5, 23, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° C or above 54° C. VDP and Baro-VNAV NA when using FLD altimeter setting. When local altimeter setting not received, use FLD altimeter setting: increase LPV DA to 1094 feet; increase LNAV/VNAV DA to 1174 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D 1⅛ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 3000 direct PRIMO and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	132.3	122.95

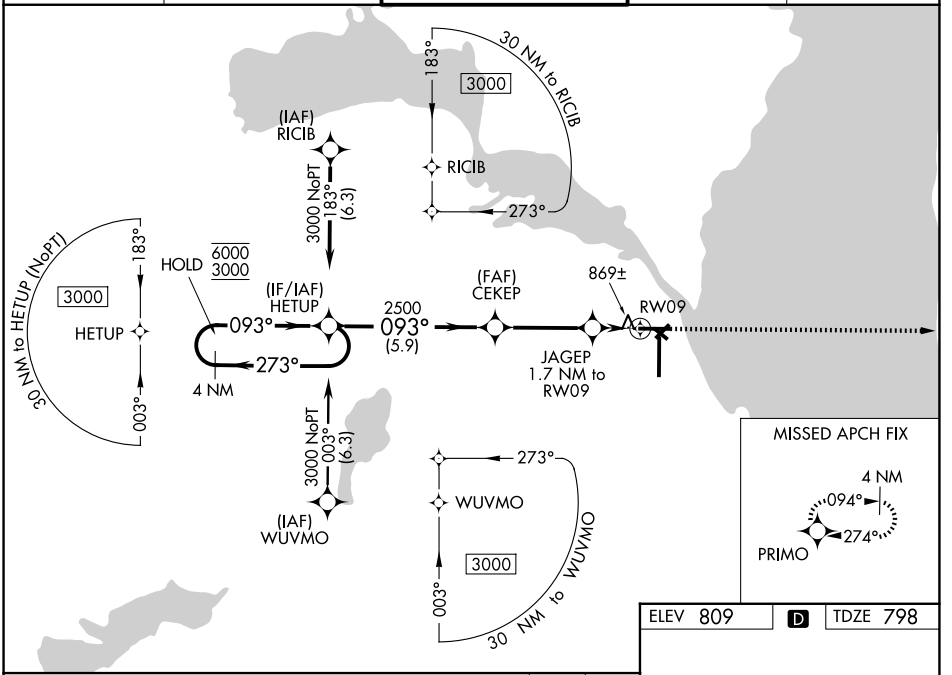

ELEV 809 D TDZE 798

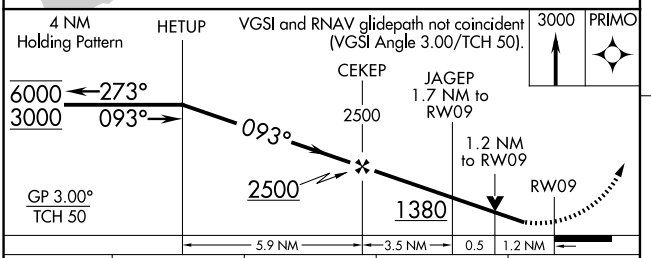

CATEGORY	A	B	C	D
LPV DA	1061-⅞ 263 (300-⅞)			
LNAV/VNAV DA	1141-1 343 (400-1)			
LNAV MDA	1220-1 422 (500-1)		1220-1¼ 422 (500-1¼)	
CIRCLING	1280-1 471 (500-1)	1300-1 491 (500-1)	1360-1½ 551 (600-1½)	1440-2 631 (700-2)

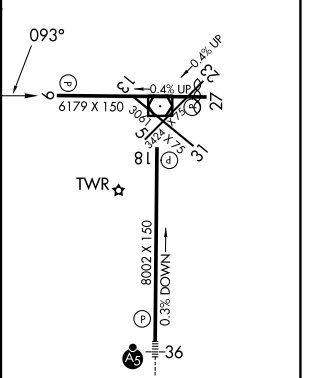

REIL Rwys 18 and 27 L
HIRL Rwys 9-27 and 18-36 L

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026