

LOC/DME I-HUM

110.5

APP CRS

042°

Rwy Ldg TDZE

8

8950

Apt Elev

13

Chan 42

ILS Y RWY 4R

DANIEL K INOUEY INTL (HNL) (PHNL)


DME required. From HUBAP: RNAV 1-GPS required. DME or RADAR required for procedure entry.

MALS R

MISSED APPROACH: Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. *Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-ILS 4R minimums).

For inop ALS, increase S-ILS 4R all Cats visibility to ¾ SM.

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6	121.4 281.4

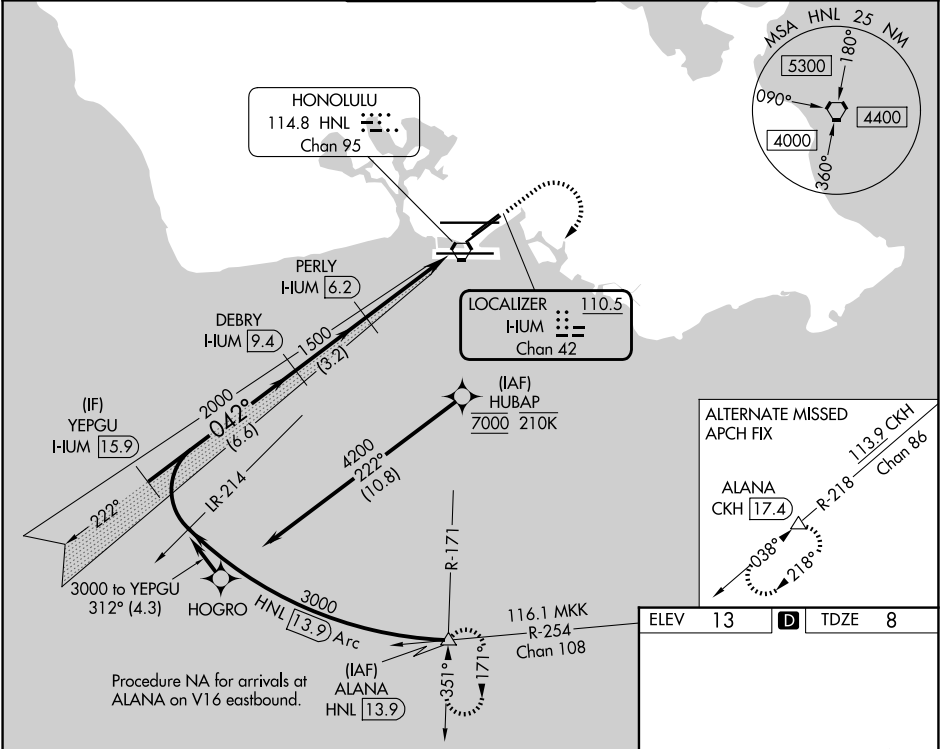

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

YEPGU I-HUM 15.9

DEBRY HUM 9.4

PERLY HUM 6.2

3000

2000

1500

GS 3.00° TCH 55

6.6 NM

3.2 NM

4.5 NM

540

3000

hdg 220°

HNL R-171

ALANA

CATEGORY	A	B	C	D
S-ILS 4R*		258-1½	250 (300-½)	
S-ILS 4R		308-1½	299 (300-½)	

MIRL Rwy 4L-22R

REIL Rwys 4L, 8R, 22L, 22R, and 26R

HIRL Rwys 4R-22L, 8L-26R, and 8R-26L