
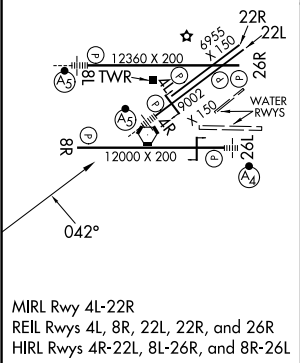


APP CRS	Rwy Ldg	8950
042°	TDZE	9
	Apt Elev	13

RNAV (RNP) Z RWY 4R

DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH.		MALSR	MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct ALANA and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. For inop ALS, increase RNP 0.30 Cat A visibility to ¾ SM and Cat B to ⅞ SM.				
D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6	121.4 281.4

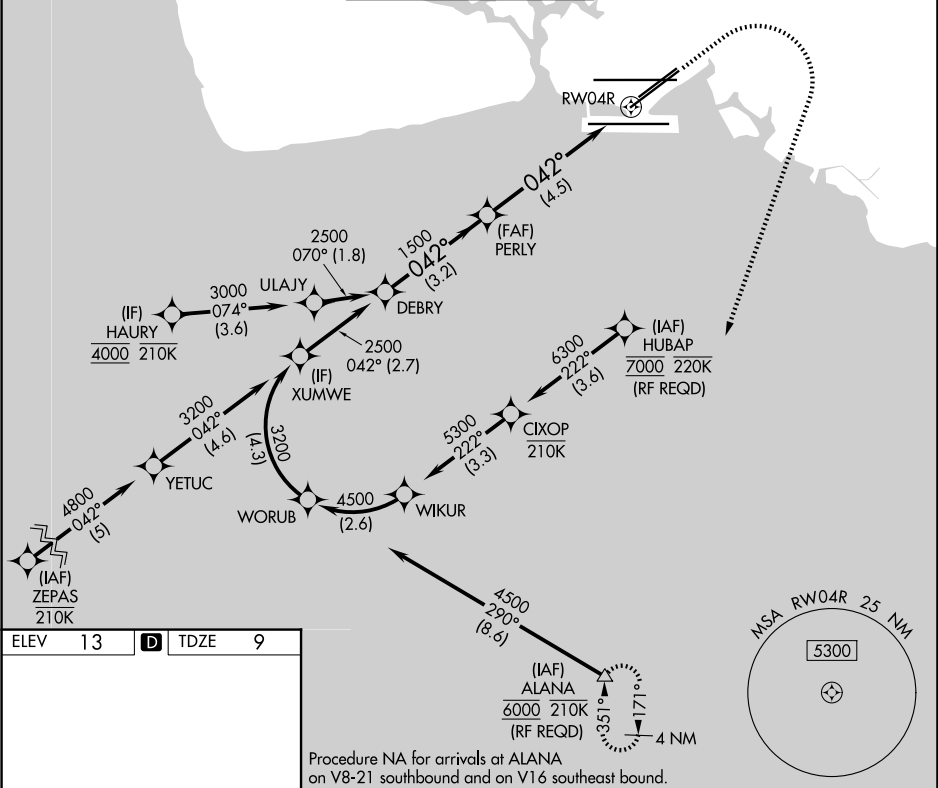

DEBRY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).		580	3000	ALANA
2500		042°		↑	↷	△
GP 3.00° TCH 55		1500		See planview for multiple IF locations.		
		PERLY		RW04R		
		3.2 NM		4.5 NM		
CATEGORY	A	B	C	D		
RNP 0.30 DA	259-½ 250 (300-½)	277-½ 268 (300-½)	432-¾	423 (500-¾)		
AUTHORIZATION REQUIRED						

PAC, 14 MAY 2026 to 09 JUL 2026

PAC, 14 MAY 2026 to 09 JUL 2026