

LOC/DME I-FNU 110.15 Chan 38 (Y)	APP CRS 275°	Rwy Ldg 11002 TDZE 45 Apt Elev 55
--	------------------------	--


ILS or LOC RWY 27R

ORLANDO SANFORD INTL (SFB)



MAJLR MISSED APPROACH: Climb to 500 then climbing right turn to 2800 on heading 280° and ORL VORTAC R-355 to PAOLA INT/ORL 15.6 DME and hold, continue climb-in-hold to 2800.

▲ For inop ALS, increase PESIY FIX minimums
▲ Cat C/D visibility to 1 SM.

ATIS 125.975	ORLANDO APP CON 135.3 351.9 (N) 125.225 351.9 (S)	SANFORD TOWER★ 120.3 (CTAF) 0 254.35	GND CON 121.35 254.35
------------------------	---	--	---------------------------------

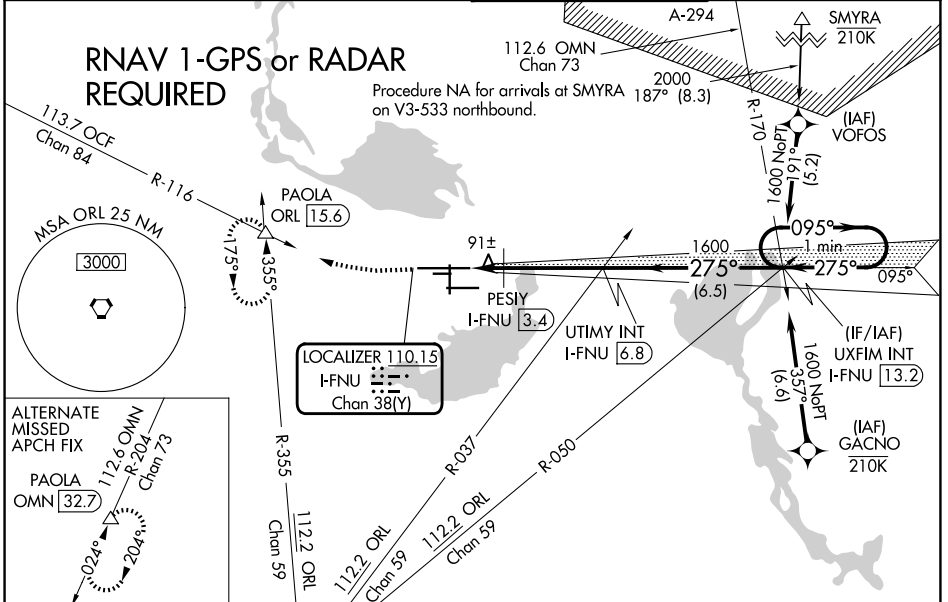

ELEV 55	D	TDZE 45	500	2800	PAOLA	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).
			↑	hdg 280°	ORL R-355	UXFIM INT I-FNU 13.2

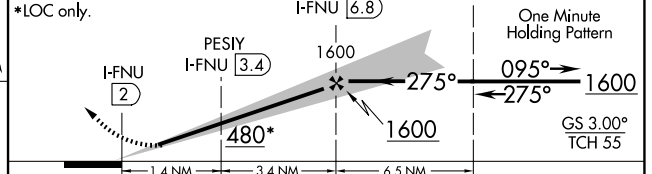

MIRL Rwy 9C-27C and 18-36
HIRL Rwy 9L-27R and 9R-27L
REIL Rwy 9C, 18, 27L and 36

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

CATEGORY	A	B	C	D
S-ILS 27R		245-½	200 (200-½)	
S-LOC 27R	480-½	435 (500-½)	480-¾	435 (500-¾)
CIRCLING	580-1	525 (600-1)	600-1½ 545 (600-1½)	640-2 585 (600-2)
PESIY FIX MINIMUMS				
S-LOC 27R	400-½	355 (400-½)	400-⅝	355 (400-⅝)
CIRCLING	580-1	525 (600-1)	600-1½ 545 (600-1½)	640-2 585 (600-2)

SE-3, 11 JUN 2026 to 09 JUL 2026

SE-3, 11 JUN 2026 to 09 JUL 2026