RNAV (GPS) RWY 25

NEWPORT NEWS/WILLIAMSBURG INTL (PHF)

WAAS CH 45510 W25A	APP CRS 247°	Rwy Ldg 8003 / TDZE 41 / Apt Elev 42

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using ORF altimeter setting. When local altimeter setting not received, use ORF altimeter setting and increase LPV DA to 289 feet; increase LNAV/VNAV DA to 564 feet and all visibilities ⅛ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 direct JAWES and hold.

ATIS	NORFOLK APP CON	NEWPORT NEWS TOWER★	GND CON	UNICOM
128.65	125.7 335.625	118.7 (CTAF) L 257.9 348.6	121.9 348.6	122.95

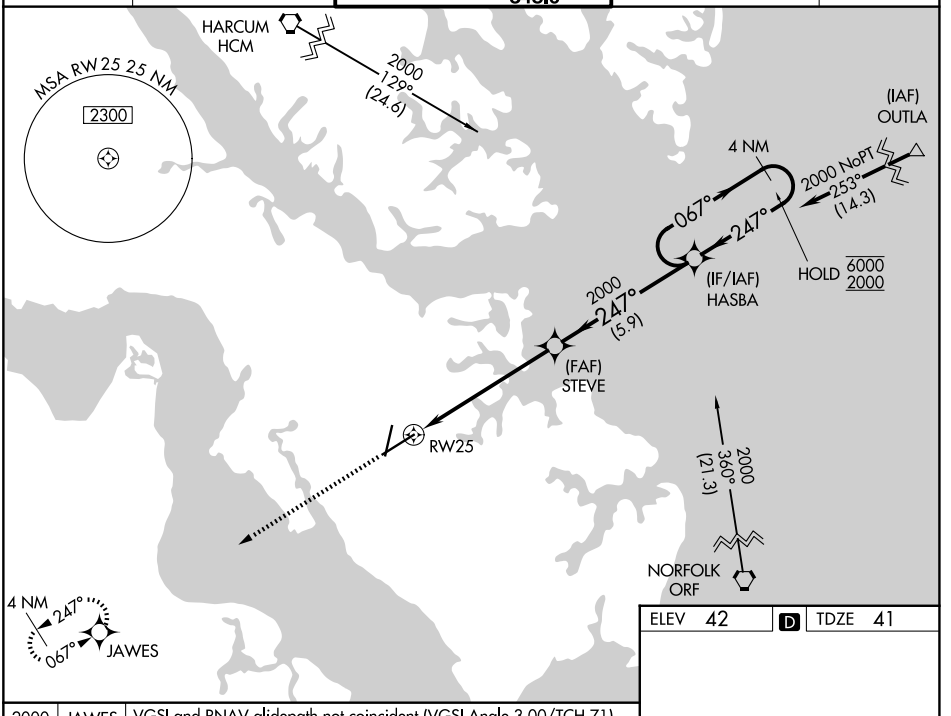

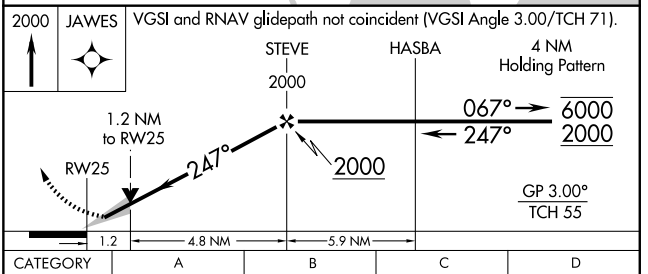



CATEGORY	A	B	C	D
LPV DA	241- ¾ 200 (200- ¾)			
LNAV/VNAV DA	480-1¼ 439 (500-1¼)			
LNAV MDA	480-1 439 (500-1)		480-1¼ 439 (500-1¼)	
CIRCLING	520-1 478 (500-1)	540-1 498 (500-1)	760-2 718 (800-2)	780-2 ¼ 738 (800-2¼)

REIL Rwys 20 and 25 L
HIRL Rwys 2-20 and 7-25 L

NE-3, 11 JUN 2026 to 09 JUL 2026
NE-3, 11 JUN 2026 to 09 JUL 2026