


WAAS CH 69610 W03A	APP CRS 030°	Rwy Ldg TDZE Apt Elev	5204 700 708
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3

CLINTON MUNI (CWI)




RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C. Baro-VNAV and VDP NA when using DVN altimeter setting. When local altimeter setting not received, use DVN altimeter setting and increase LPV DA to 947 feet; increase LNAV/VNAV DA to 1086 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV visibility Cat C 1/8 SM.

MALSR 

MISSED APPROACH: Climb to 2500 direct CUDMA and hold.

AWOS-3PT 125.525	QUAD CITY APP CON* 125.95 257.8	UNICOM 123.075 (CTAF) 
----------------------------	---	---

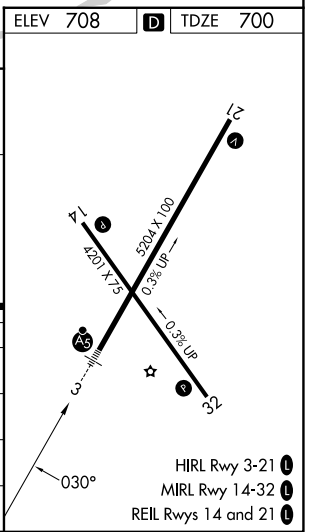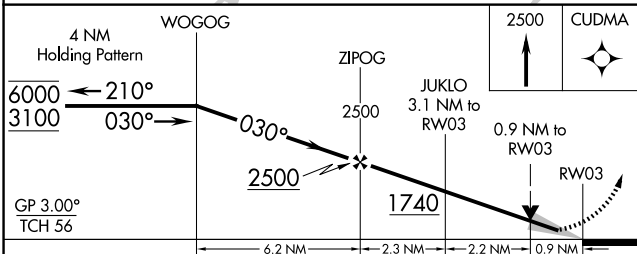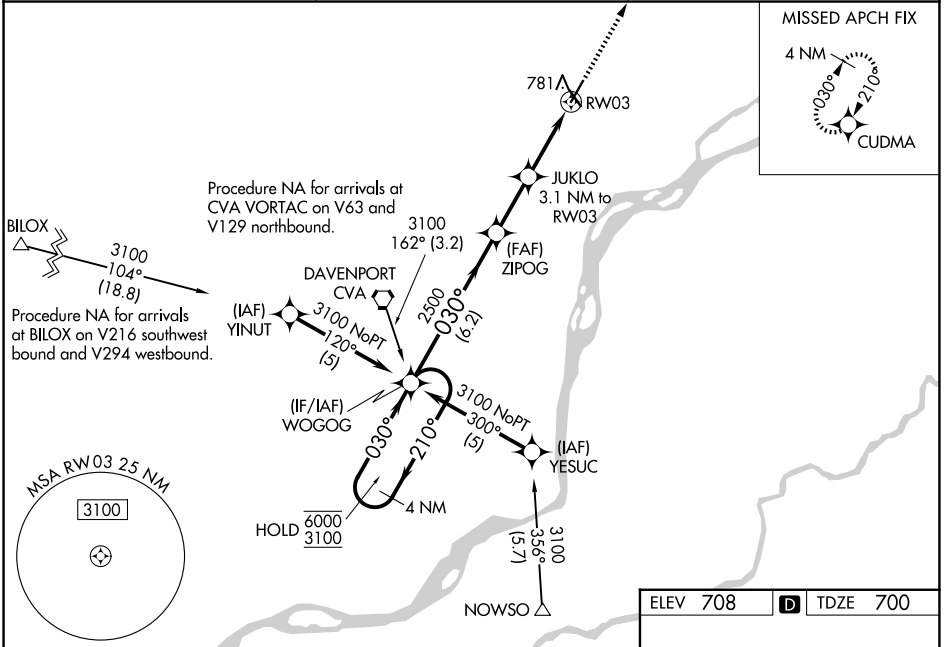

CATEGORY	A	B	C	D
LPV DA	900-1/2	200 (200-1/2)		NA
LNAV/VNAV DA	1039-1/2	339 (400-1/2)		NA
LNAV MDA	1040-1/2	340 (400-1/2)		NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1 1/2 532 (600-1 1/2)	NA

NC-3, 11 JUN 2026 to 09 JUL 2026

NC-3, 11 JUN 2026 to 09 JUL 2026