

WAAS CH 82031 W27A	APP CRS 275°	Rwy Ldg 7500 TDZE 53 Apt Elev 53
--	------------------------	---

RNAV (GPS) RWY 27
MERLE K (MUDHOLE) SMITH (CDV)(PACV)

RNP APCH-GPS.

V Baro-VNAV NA. VDP NA with Valdez altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to RVR 4500, UNAV/VNAV all Cats visibility to 1/2. UNAV Cats A/B visibility to RVR 5500, Cats C/D visibility to RVR 6000. When local altimeter setting not received use Valdez altimeter setting and increase all DA 113 feet and all MDA 120 feet, and increase LPV all Cats visibility to RVR 4000, increase UNAV/VNAV all Cats visibility to 1/2, increase UNAV Cats C/D visibility to RVR 5500.

A For inoperative MALSR when using Valdez altimeter setting, increase LPV all Cats visibility to RVR 6000, UNAV Cats A/B visibility to RVR 5500, and UNAV Cats C/D visibility to 1/2.

W Circling to Rwy 16/34 NA at night. Circling NA north of Rwy 9/27.

MAISR




MISSED APPROACH:
Climb to 600 then
climbing left turn to
3000 direct CORVA
and hold.


ASOS
134.8


ANCHORAGE CENTER
119.3 133.6 269.4

JUNEAU RADIO
122.2 123.6 (CTAF)

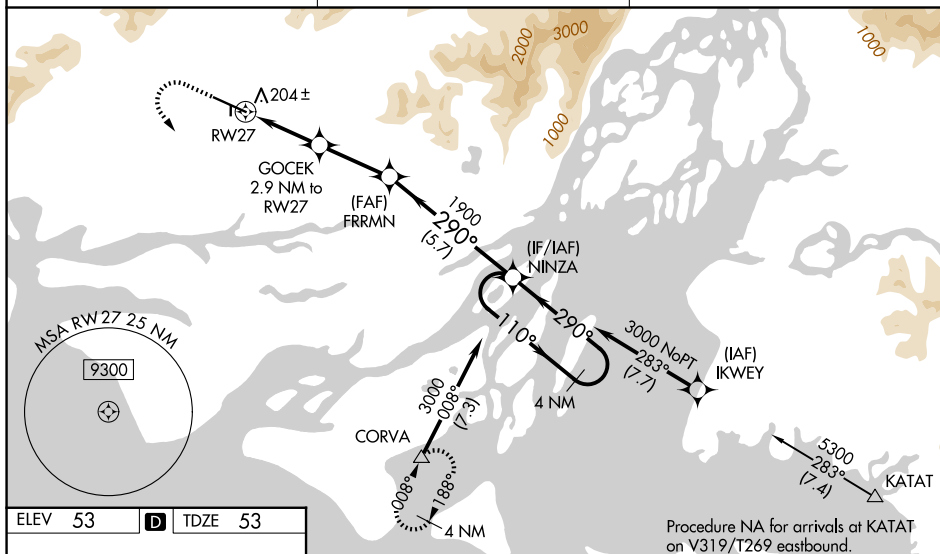

ELEV 53	D	TDZE 53
---------	----------	---------



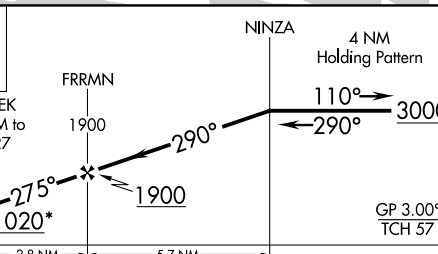													
*LNAV only.						GOCEK 2.9 NM to RW27							
*1.1 NM to RW27						275°							
1.1 NM						1020*							
1.8 NM						1900							
2.8 NM						5.7 NM							
CATEGORY						A		B		C		D	
LPV		DA		328/24 275 (300-½)									
LNAV/ VNAV		DA		523/56 470 (500-1¼)									
LNAV		MDA		460/24 407 (500-½)						460/40 407 (500-¾)			
CIRCLING		480-1 427 (500-1)		520-1 467 (500-1)		520-1½ 467 (500-1½)		1540-3 1487 (1500-3)					