


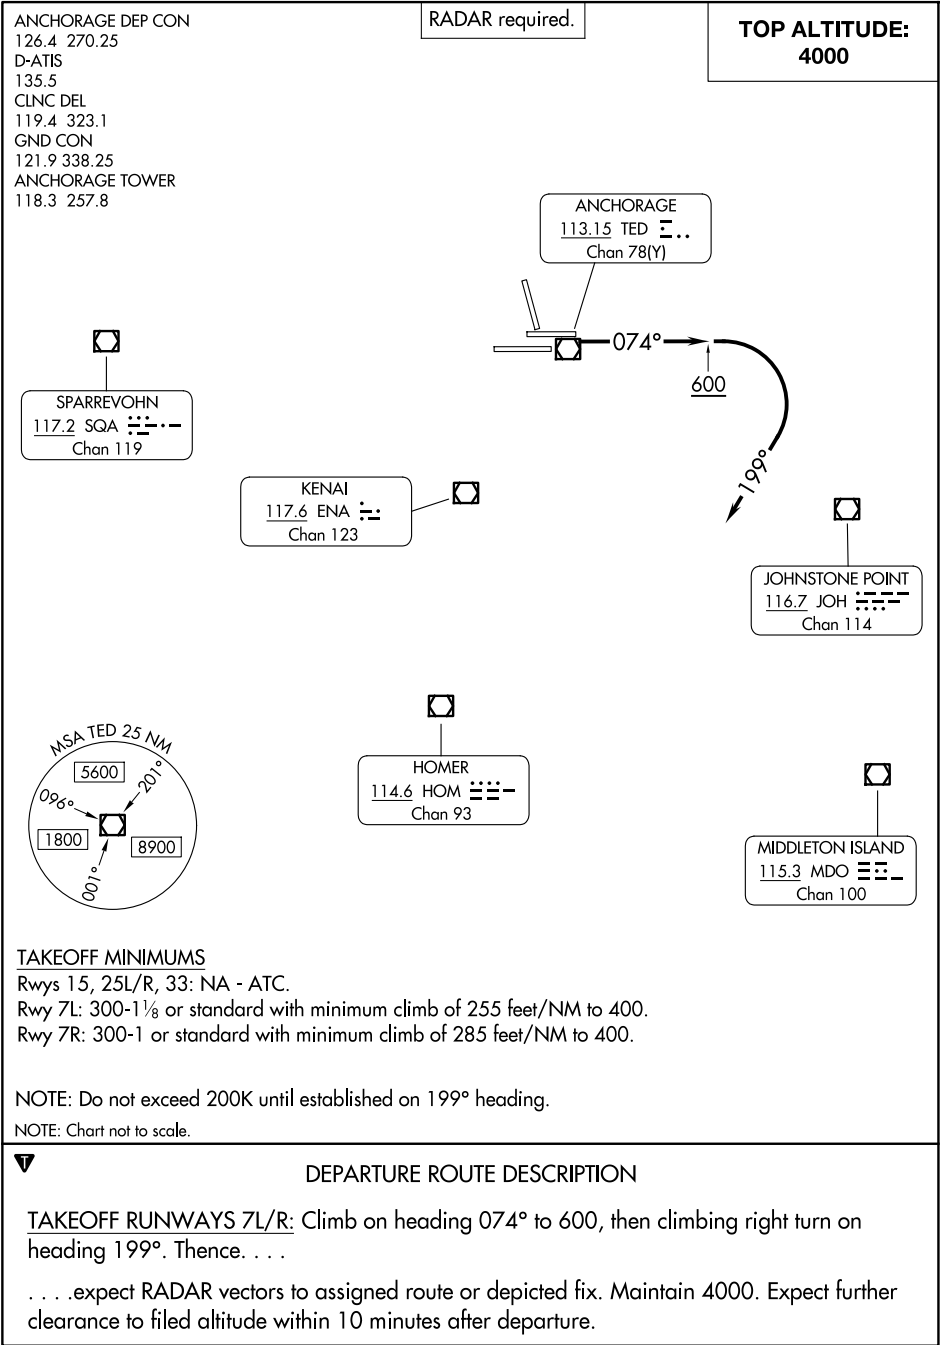

TAKEOFF MINIMUMS

Rwys 15, 25L/R, 33: NA - ATC.
Rwy 7L: 300-1½ or standard with minimum climb of 255 feet/NM to 400.
Rwy 7R: 300-1 or standard with minimum climb of 285 feet/NM to 400.

NOTE: Do not exceed 200K until established on 199° heading.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb on heading 074° to 600, then climbing right turn on heading 199°. Thence. . .

. . . expect RADAR vectors to assigned route or depicted fix. Maintain 4000. Expect further clearance to filed altitude within 10 minutes after departure.