

RNAV (GPS) RWY 11

| | | |
|-------------|------------|-------------|
| APCH CRS | Rwy Idg | 8000 |
| 105° | TDZE | 318 |
| | Arprt Elev | 322 |



[USN]

GOLIAD NOLF (KNGT)

RNP APCH
 When local altimeter setting not received, use Beeville Muni altimeter setting.



MISSED APPROACH: Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

ASOS **353.675** CTAF **132.875 307.075**

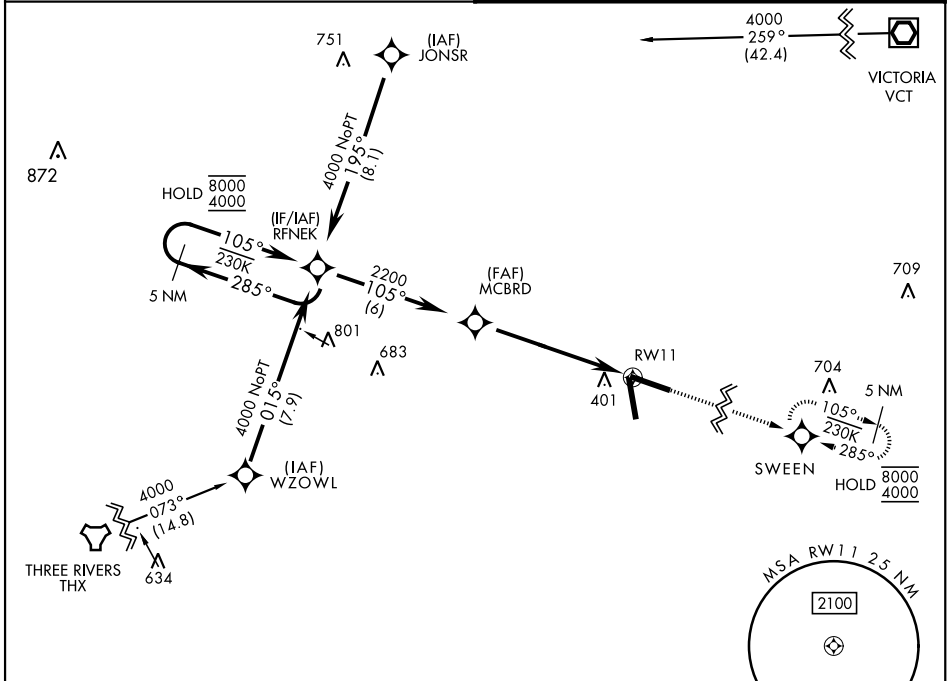

US Navy Training Wing Four Use Only
 EMERG SAFE ALT 100 NM 11,100

| | | | | | | |
|----------------------|-------|--|------|-------|----------|----------|
| 5 NM Holding Pattern | RFNEK | VDP NA with Beeville Muni altimeter setting. | 4000 | SWEEN | ELEV 322 | TDZE 318 |
|----------------------|-------|--|------|-------|----------|----------|

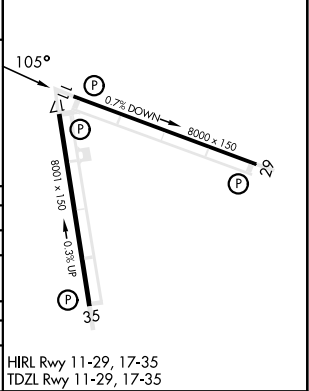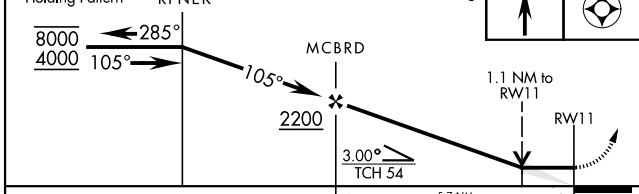

| CATEGORY | A | B | C | D |
|--|-------------------|---------------------|---------------------|-------------------|
| LNAV MDA | 720-1 402 (400-1) | 720-1½ 402 (400-1½) | 720-1½ 402 (400-1½) | 880-2 558 (600-2) |
| CIRCLING | 800-1 478 (500-1) | 820-1 498 (500-1) | 820-1½ 498 (500-1½) | 880-2 558 (600-2) |
| BEEVILLE MUNI ALTIMETER SETTING MINIMA | | | | |
| LNAV MDA | 760-1 442 (500-1) | 760-1½ 442 (500-1½) | 820-1½ 498 (500-1½) | 880-2 558 (600-2) |
| CIRCLING | 800-1 478 (500-1) | 820-1 498 (500-1) | 820-1½ 498 (500-1½) | 880-2 558 (600-2) |

HIRL Rwy 11-29, 17-35
 TDZL Rwy 11-29, 17-35

RNAV (GPS) RWY 11

SC-3, 11 JUN 2026 to 09 JUL 2026

SC-3, 11 JUN 2026 to 09 JUL 2026