

WAAS CH <b>77704</b> <b>W23A</b>	APP CRS <b>230°</b>	Rwy Ldg <b>11498</b> TDZE <b>87</b> Apt Elev <b>93</b>
--	------------------------	--

# RNAV (GPS) RWY 23


KINSTON RGNL JETPORT AT STALLINGS FLD (ISO)

RNP APCH - GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using GSB altimeter setting. When local altimeter setting not received, use GSB altimeter setting and increase LPV DA to 433 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 480 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet; and Circling visibility Cat D/E 1/4 SM.

MISSED APPROACH:  
Climb to 2100 direct UHIRO and hold.

AWOS-3 <b>132.75</b>	SEYMOUR JOHNSON APP CON ★ <b>127.3 273.6</b>	KINSTON TOWER ★ <b>120.6 (CTAF) 335.55</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-------------------------	---	---	-------------------------	-------------------------

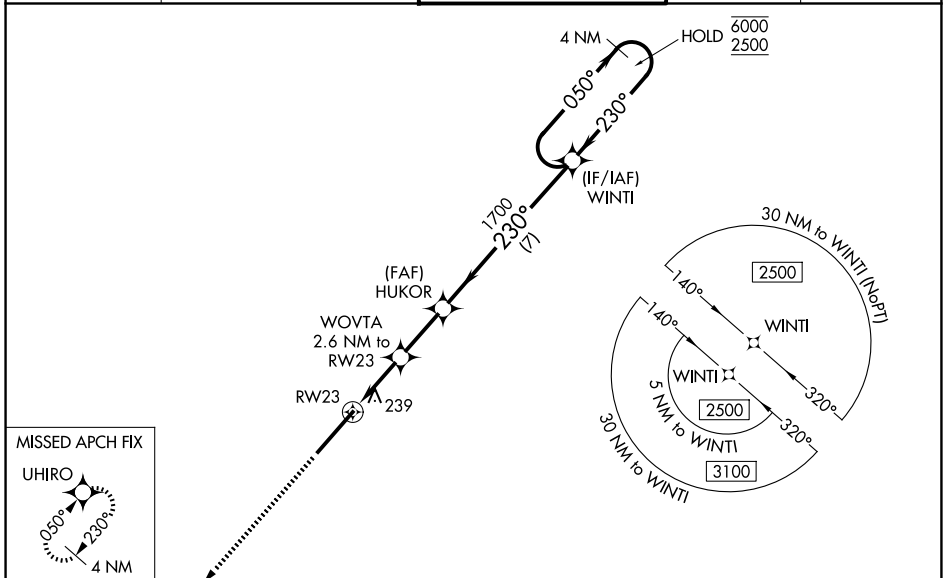

ELEV 93	TDZE 87
---------	---------

2100 UHIRO VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

4 NM Holding Pattern

WINTI

050° → 6000  
← 230° 2500

GP 3.00° TCH 50

	A	B	C	D	E
CATEGORY	A	B	C	D	E
LPV DA	390-7/8		303 (300-7/8)		
LNAV/VNAV DA	437-1		350 (400-1)		
LNAV MDA	540-1	453 (500-1)	540-1 3/8		453 (500-1 3/8)
CIRCLING	540-1	560-1	700-1 3/4	740-2	780-2 1/2
	447 (500-1)	467 (500-1)	607 (700-1 3/4)	647 (700-2)	687 (700-2 1/2)

# RNAV (GPS) RWY 23

SE-2, 11 JUN 2026 to 09 JUL 2026

SE-2, 11 JUN 2026 to 09 JUL 2026