RNAV (GPS) RWY 36

TALLAHASSEE INTL (TLH)

WAAS	APP CRS	Rwy Ldg	7000
CH 60900	004°	TDZE	62
W36A		Apt Elev	83

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.

For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.

ATIS	TALLAHASSEE APP CON *	TALLAHASSEE TOWER *	GND CON	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) L 257.8	121.9 348.6	123.075

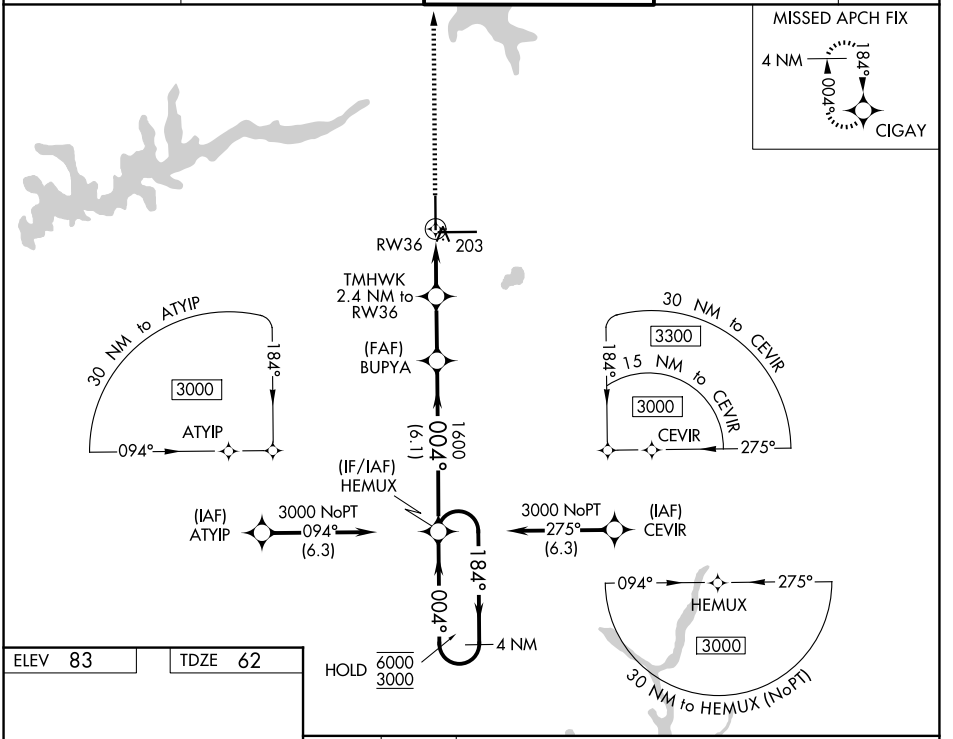

ELEV 83 TDZ 62

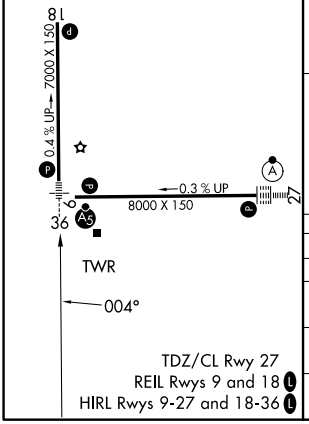

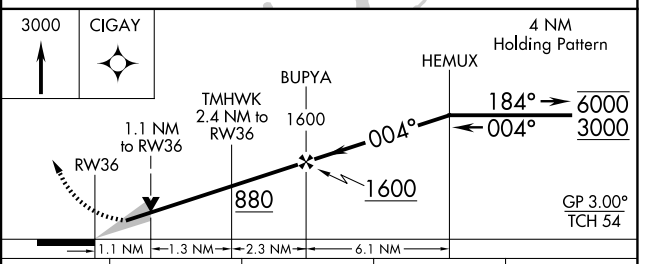

CATEGORY	A	B	C	D
LPV DA *	262/24 200 (200-½)			
LNAV/VNAV DA	364/24 302 (300-½)			
LNAV MDA	460/24 398 (400-½)		460/35 398 (400-⅝)	
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)

SE-3, 11 JUN 2026 to 09 JUL 2026
SE-3, 11 JUN 2026 to 09 JUL 2026