WAAS CH 86830 W02B	APP CRS 015°	Rwy Idg 7571 TDZE 754 Apt Elev 759

RNAV (GPS) RWY 2L

DUPAGE (DPA)

RNP APCH - GPS.

Circling Rwy 15, 28, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct HINCK and hold.

ATIS	CHICAGO APP CON	DUPAGE TOWER	GND CON	CLNC DEL
132.075	133.5 349.0	120.9 257.8	121.8	119.75

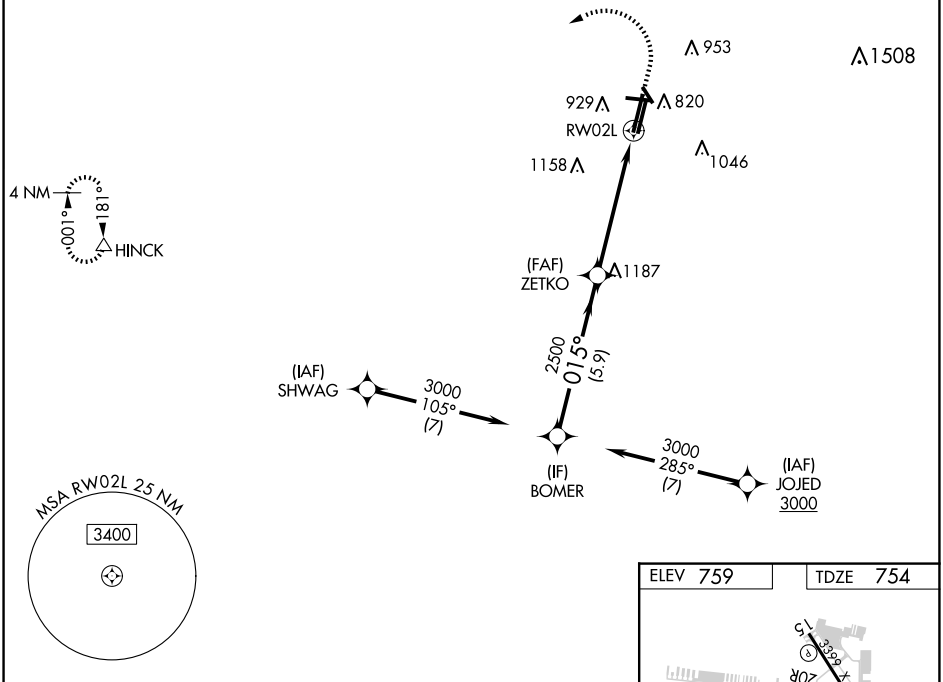

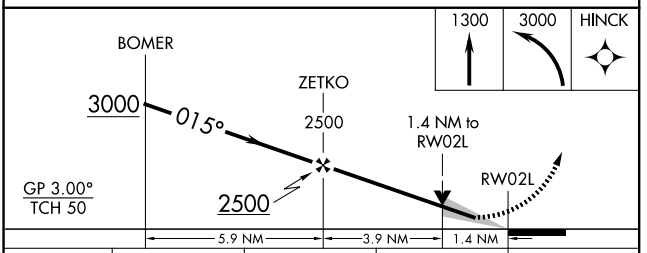

CATEGORY	A	B	C	D
LPV DA		954/18	200 (200-½)	
LNAV/VNAV DA		1214/45	460 (500-⅞)	
LNAV MDA	1260/24	506 (600-½)	1260/55	506 (600-1)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)

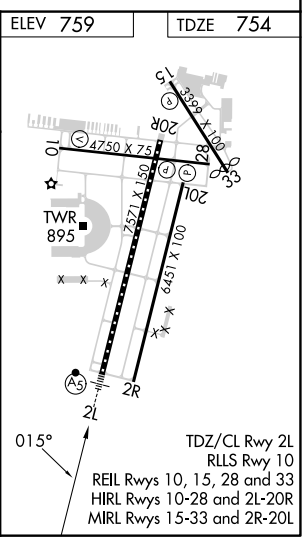

TDZ/CL Rwy 2L
RLLS Rwy 10
REIL Rwys 10, 15, 28 and 33
HIRL Rwys 10-28 and 2L-20R
MIRL Rwys 15-33 and 2R-20L

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026