




WAAS CH 77507 W29A	APP CRS 294°	Rwy Ldg TDZE Apt Elev	8099 531 544
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29



ST LOUIS RGNL (ALN)

RNP APCH.			MISSED APPROACH: Climb to 2400 direct SQUAR and hold.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 3/8 SM and LNAV Cat C/D visibility to 1 SM.			

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER* 126.0(CTAF) 0 239.0	GND CON 120.2	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

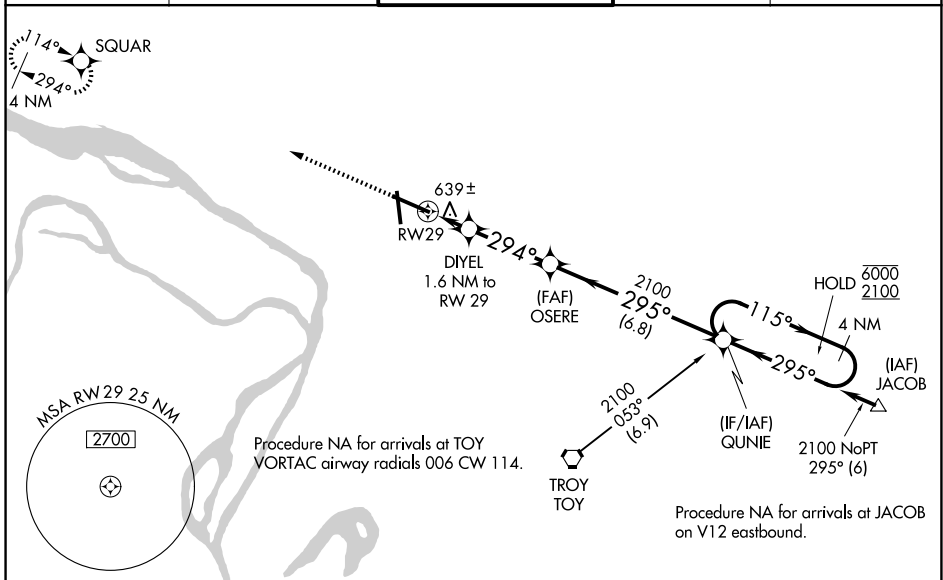

ELEV 544	D	TDZE 531
----------	----------	----------

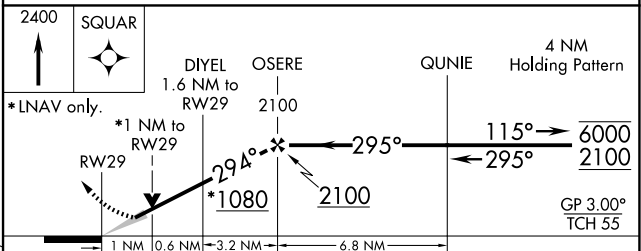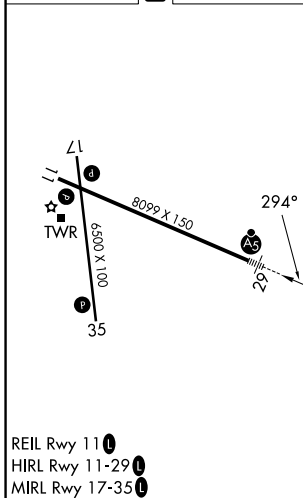

	CATEGORY	A	B	C	D
LPV	DA		731-1/2	200 (200-1/2)	
LNAV/VNAV	DA		825-1/2	294 (300-1/2)	
LNAV	MDA	900-1/2	369 (400-1/2)	900-3/4	369 (400-3/4)
CIRCLING		1000-1	456 (500-1)	1160-13/4 616 (700-13/4)	1200-2 656 (700-2)

EC-3, 11 JUN 2026 to 09 JUL 2026

EC-3, 11 JUN 2026 to 09 JUL 2026