

WAAS CH 77900 W13A	APP CRS 130°	Rwy Ldg TDZE Apt Elev	6701 1301 1304
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13



MITCHELL MUNI (MHE)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using HON altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use HON altimeter setting and increase LPV DA to 1664 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 1776 feet and all visibilities 1/4 SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

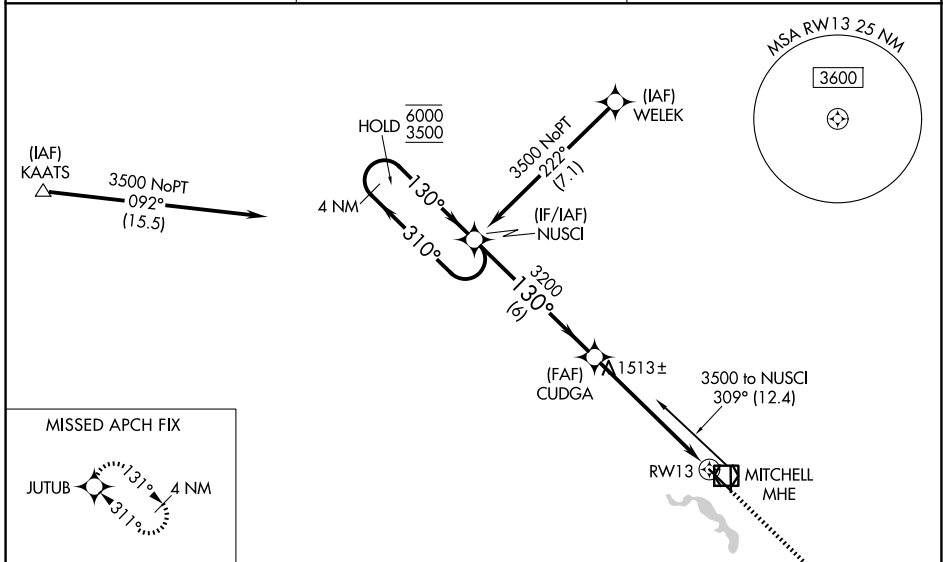

ELEV 1304	TDZE 1301
-----------	-----------

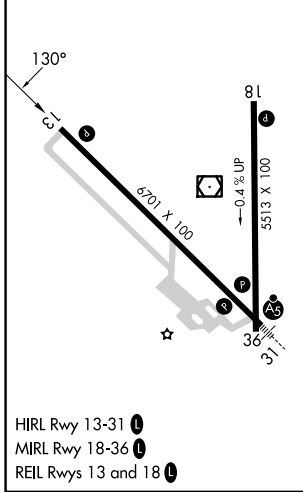

	4 NM Holding Pattern	NUSCI	CUDGA	3200	JUTUB
	6000 ← 310°	130° →	130°	1.4 NM to RWY 13	RWY 13
	3500		3200		
	GP 3.00° TCH 46	6 NM	4.4 NM	1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	1575-1		274 (300-1)		
LNAV/VNAV DA	1687-1¼		386 (400-1¼)		
LNAV MDA	1780-1	479 (500-1)	1780-1⅜	479 (500-1⅜)	
CIRCLING	1780-1¼	476 (500-1¼)	1820-1½	1880-2	576 (600-2)

NC-1, 11 JUN 2026 to 09 JUL 2026

NC-1, 11 JUN 2026 to 09 JUL 2026