




| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 72900 W09A | APP CRS 093° | Rwy Ldg TDZE Apt Elev | 6000 10 10 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 9R

MIAMI EXEC (TMB)

| | | | |
|-----------|--|---------------|--|
| RNP APCH. | <p>⚠ Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Baro-VNAV and VDP NA when using Miami Intl altimeter setting. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA by 27 feet and all MDA 40 feet, increase LNAV Cats C/D visibility ½ SM. For inop ALS when using Miami Intl altimeter setting, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to 1½ SM.</p> | <p>MALSRL</p> | <p>MISSED APPROACH: Climb to 3000 direct JURER and hold, continue climb-in-hold to 3000.</p> |
|-----------|--|---------------|--|

| | | | |
|----------------------|-------------------------------------|---|-------------------------|
| ATIS 124.0 | MIAMI APP CON 125.5 354.1 | MIAMI EXEC TOWER ★ 118.9 (CTAF) 0 | GND CON 121.7 |
|----------------------|-------------------------------------|---|-------------------------|

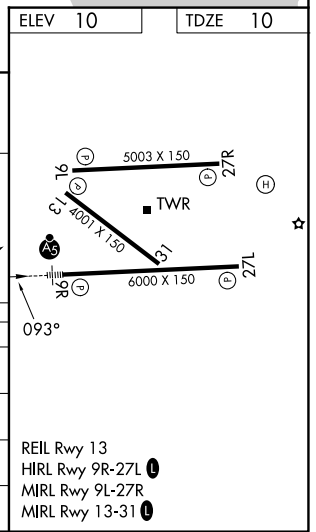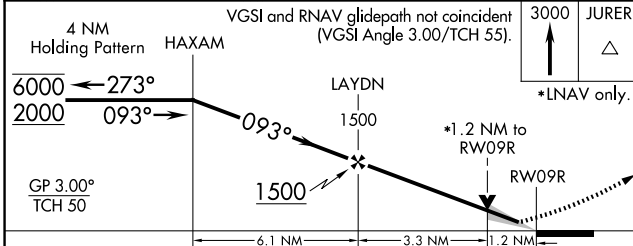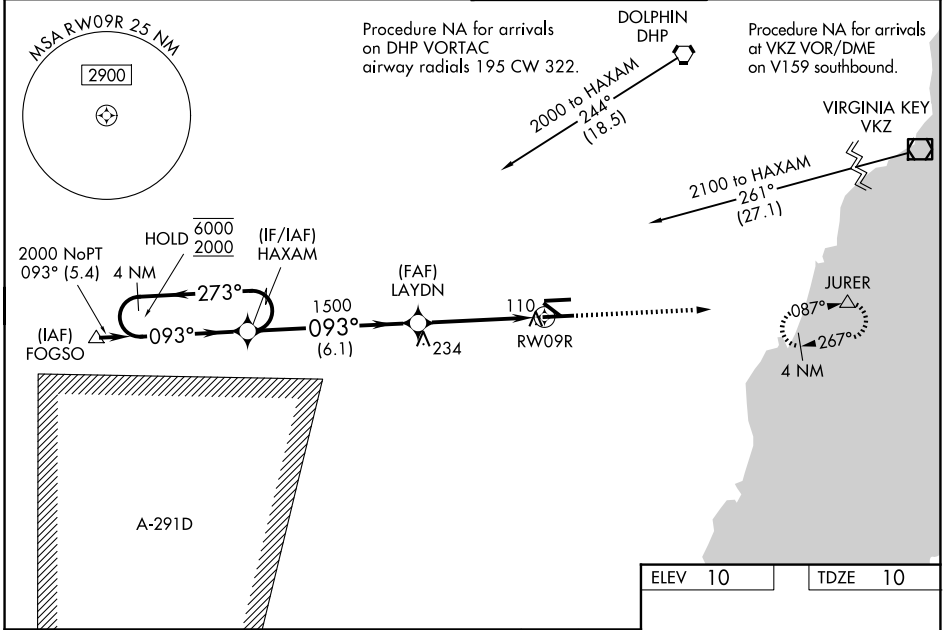

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------|----------------------|
| LPV DA | | 210-½ | 200 (200-½) | |
| LNAV/VNAV DA | | 302-½ | 292 (300-½) | |
| LNAV MDA | 460-½ | 450 (500-½) | 460-⅞ | 450 (500-⅞) |
| CIRCLING | 460-1 450 (500-1) | 560-1 550 (600-1) | 640-1¼ 630 (700-1¼) | 640-2 630 (700-2) |

SE-3, 11 JUN 2026 to 09 JUL 2026

SE-3, 11 JUN 2026 to 09 JUL 2026