

WAAS CH <b>81914</b> <b>W26B</b>	APP CRS <b>259°</b>	Rwy Ldg TDZE <b>462</b> Apt Elev <b>463</b>	<b>7005</b>
--	------------------------	---	-------------


# RNAV (GPS) RWY 26L

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.


**⚠** Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS when using St Louis Lambert Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1 3/8 SM and LNAV Cat C and D to 1 3/8 SM. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 705 feet; increase LNAV/VNAV DA to 959 feet and all visibilities to RVR 5000; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C 1/4 SM.

\*RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).


MALSR 

MISSED APPROACH: Climb to 3000 direct JOBRK and hold.

ATIS <b>134.8</b>	ST. LOUIS APP CON <b>126.5 254.3</b>	SPIRIT TOWER ★ <b>124.75 (CTAF) 257.2</b>	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
----------------------	---	--	-------------------------	-------------------------

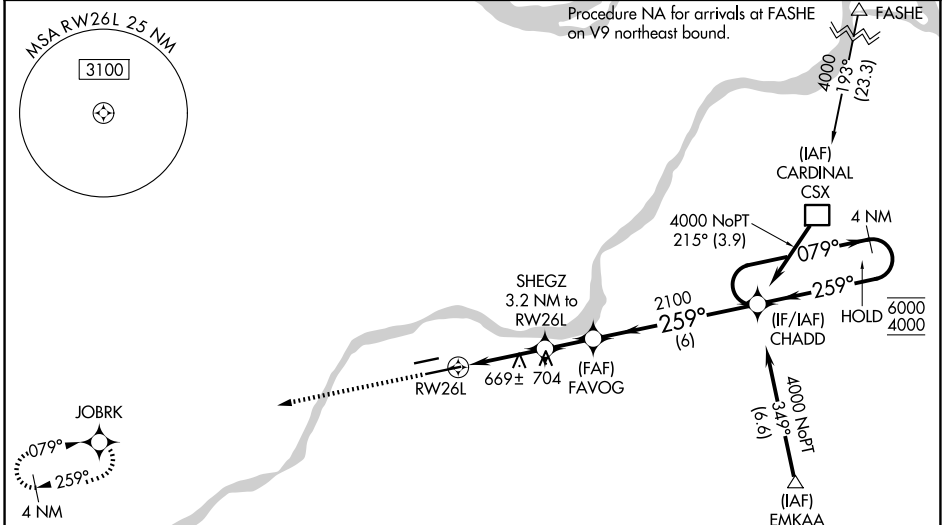

ELEV 463	<b>D</b>	TDZE 462
----------	----------	----------

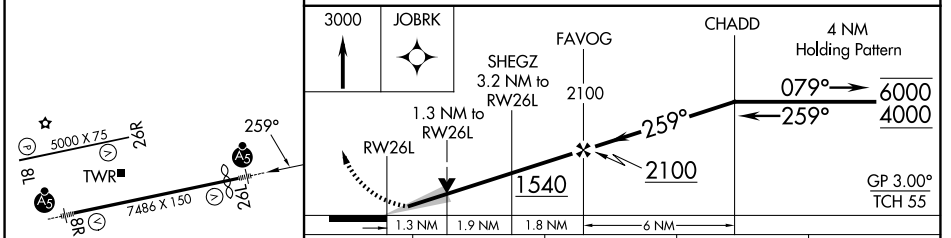

CATEGORY	A	B	C	D
LPV DA*	662/24		200 (200-1/2)	
LNAV/VNAV DA	916/45		454 (500-3/8)	
LNAV MDA	920/24	458 (500-1/2)	920/45	458 (500-3/8)
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)

ST. LOUIS, MISSOURI  
Amdt 1A 25JAN24

38°40'N-90°39'W

# RNAV (GPS) RWY 26L

SPIRIT OF ST LOUIS (SUS)

NC-3, 11 JUN 2026 to 09 JUL 2026

NC-3, 11 JUN 2026 to 09 JUL 2026