

|                                        |                        |                             |                                       |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>77826</b><br><b>W08A</b> | APP CRS<br><b>087°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>9000</b><br><b>95</b><br><b>96</b> |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

# RNAV (GPS) Z RWY 8L

GEORGE BUSH INTCNL/HOUSTON (IAH)

**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1¼, and LNAV Cat C/D/E visibility to 1¾. Simultaneous approach authorized with Rwy 8R and Rwy 9. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

ALSF-2







MISSED APPROACH: Climb to 580 then climbing left turn to 4000 direct CLEEP and hold.

|                         |                                                                    |                                      |                           |
|-------------------------|--------------------------------------------------------------------|--------------------------------------|---------------------------|
| D-ATIS<br><b>124.05</b> | HOUSTON APP CON<br><b>120.05 379.1 E</b><br><b>124.35 316.15 W</b> | HOUSTON TOWER<br><b>120.72 290.2</b> | GND CON<br><b>118.575</b> |
|-------------------------|--------------------------------------------------------------------|--------------------------------------|---------------------------|

## RADAR REQUIRED



MISSED APCH FIX

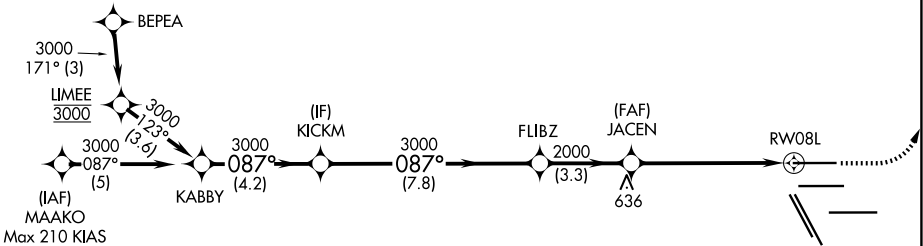

SC-5, 11 JUN 2026 to 09 JUL 2026

SC-5, 11 JUN 2026 to 09 JUL 2026

|         |                  |
|---------|------------------|
| ELEV 96 | <b>D</b> TDZE 95 |
|---------|------------------|

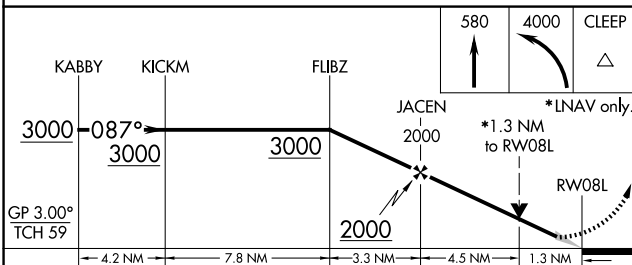

| CATEGORY     | A      | B           | C           | D           | E |
|--------------|--------|-------------|-------------|-------------|---|
| LPV DA       | 295/18 |             | 200 (200-½) |             |   |
| LNAV/VNAV DA | 486/40 |             | 391 (400-¾) |             |   |
| LNAV MDA     | 580/24 | 485 (500-½) | 580/50      | 485 (500-1) |   |

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L, 27 and 33L  
HIRL all Rwy