FORT BELVOIR, VIRGINIA

RNAV (GPS) RWY 32

WAAS	APCH CRS	Rwy ldg	4529
CH 91281	323°	TDZE	68
W32A		Arpt Elev	74

(USA)

DAVISON AAF (FORT BELVOIR) (KDAA)

RNP APCH - GPS

* When ALS inop, increase RVR to 45, vis to 7/8 mile.
** When ALS inop, increase vis to 1 3/8 miles.
*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 3/8 miles.

MALSF

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct UDUCY and hold.

ATIS	POTOMAC APP CON	TOWER★	GND CON
128.175	118.95 319.1	124.275 (CTAF) 229.4	121.9 351.8

**** When ALS inop, increase vis to 1 1/2 miles.

***** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 5/8 miles.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

If local altimeter setting not received, use Ronald Reagan Washington National altimeter setting.

Baro-VNAV NA when using Ronald Reagan Washington National altimeter setting.

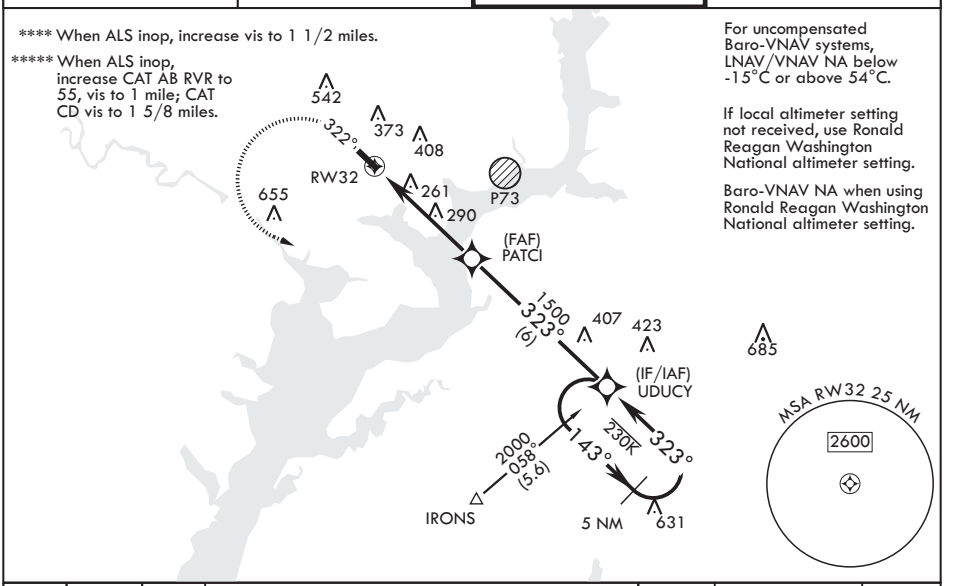

600 crs 322° | 2000 | UDUCY

VGSI and RNAV GP not coincident (VGSI Angle 3.00/TCH 35).

VDP NA with Ronald Reagan Washington National Altimeter Setting.

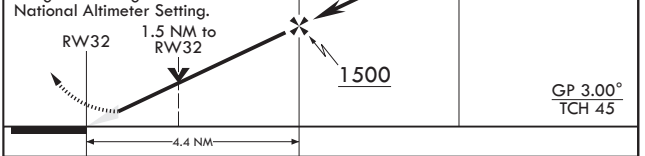

ELEV 74 | TDZE 68



CATEGORY	A	B	C	D
LPV DA*	337/40	269	(300-¾)	
LNAV/VNAV DA**	556/60	488	(500-1⅛)	
LNAV MDA***	580/40 512 (600-¾)		580-1¼ 512 (600-1¼)	
CIRCLING	680-1 606 (700-1)	720-1 646 (700-1)	760-2 686 (700-2)	1000-3 926 (1000-3)
RONALD REAGAN WASHINGTON NATIONAL ALTIMETER MINIMUMS				
LPV DA	370/40	302	(300-¾)	
LNAV/VNAV DA****	589-1¼	521	(600-1¼)	
LNAV MDA*****	620/40 552 (600-¾)		620-1⅜ 552 (600-1⅜)	
CIRCLING	720-1 646 (700-1)	760-1 686 (700-1)	800-2 726 (800-2)	1040-3 966 (1000-3)

HIRL all rwys

NE-3, 11 JUN 2026 to 09 JUL 2026
NE-3, 11 JUN 2026 to 09 JUL 2026