

WAAS CH <b>53711</b> <b>W26A</b>	APP CRS <b>256°</b>	Rwy Ldg <b>4997</b> TDZE <b>24</b> Apt Elev <b>26</b>
--	------------------------	---

# RNAV (GPS) RWY 26


PITT-GREENVILLE (PGV)

RNP APCH - GPS.


▼ Baro-VNAV NA when using Washington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 26 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received use Washington altimeter setting and increase LPV DA to 376 feet, visibility all Cats 1/8 SM; increase LNAV/VNAV DA to 505, visibility all Cats 1/8 SM; increase all MDAs 60 feet, LNAV visibility Cat C and D and Circling Cat D 1/4 SM.

MISSED APPROACH: Climb to 3000 direct EXINE and via 346° track to FESBA and via 076° track to KENIR and hold.

AWOS-3 <b>128.425</b>	WASHINGTON CENTER <b>123.85 279.65</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---	---------------------------------

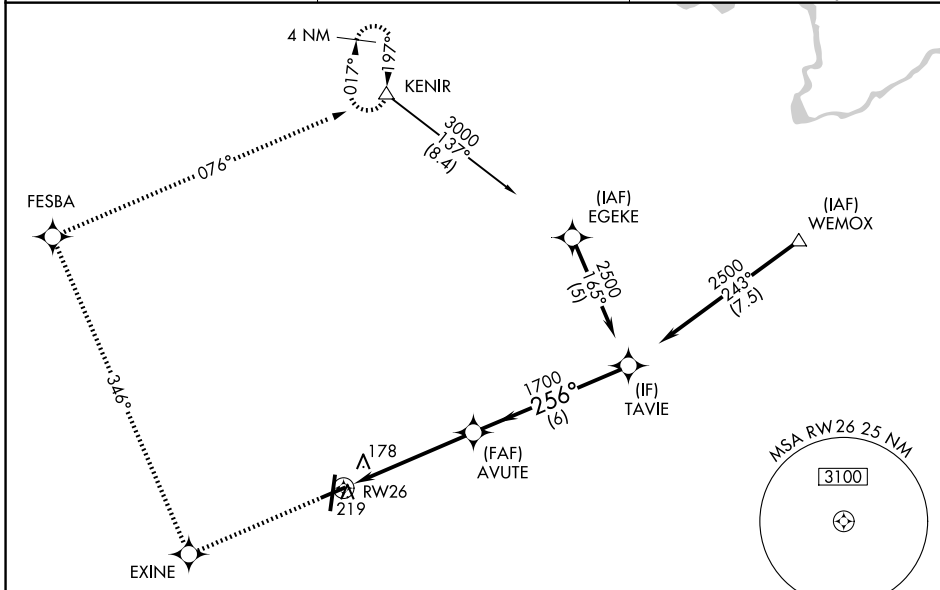

ELEV 26	<b>D</b>	TDZE 24
---------	----------	---------

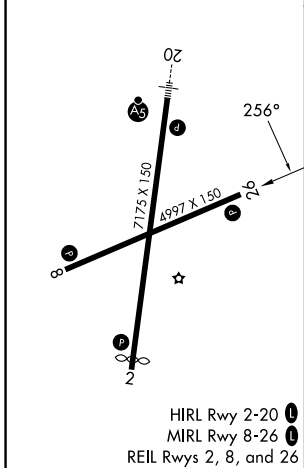

3000	EXINE	tr 346°	FESBA	tr 076°	KENIR	VGSIs and descent angles not coincident (VGSIs Angle 3.00°/TCH 40).	TAVIE 2500	Procedure Turn NA
	RWY 26		AVUTE				2500	GP 3.00° TCH 45
		5.1 NM		6 NM				
CATEGORY	A		B		C		D	
LPV DA	335-7/8		311 (400-7/8)					
LNAV/VNAV DA	464-1 1/4		440 (500-1 1/4)					
LNAV MDA	520-1		496 (500-1)		520-1 3/8		496 (500-1 3/8)	
CIRCLING	600-1 574 (600-1)		620-1 594 (600-1)		700-2 674 (700-2)		800-2 1/2 774 (800-2 1/2)	

SE-2, 11 JUN 2026 to 09 JUL 2026

SE-2, 11 JUN 2026 to 09 JUL 2026