

WAAS CH <b>62823</b> <b>W21A</b>	APP CRS <b>206°</b>	Rwy Ldg <b>5502</b>
		TDZE <b>315</b>
		Apt Elev <b>315</b>

# RNAV (GPS) RWY 21

SIKESTON MEML MUNI (SIK)

RNP APCH.



**▽** Rwy 21 helicopter visibility reduction below ¼ SM NA. Baro-VNAV NA when using Cape Girardeau altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Cape Girardeau altimeter setting and increase all DA 49 feet and all MDA 60 feet. Increase LNAV and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct CUXID and hold.

AWOS-3PT  
**119.175**

MEMPHIS CENTER  
**133.65 292.15**



UNICOM  
**122.8 (CTAF) 0**

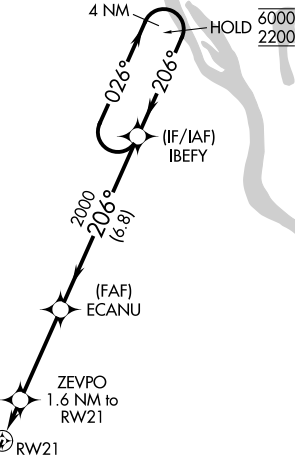

MISSED APCH FIX



ELEV 315	TDZE 315
----------	----------

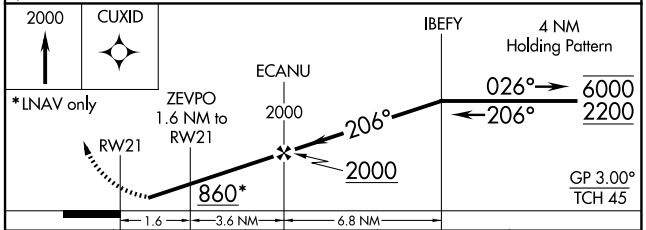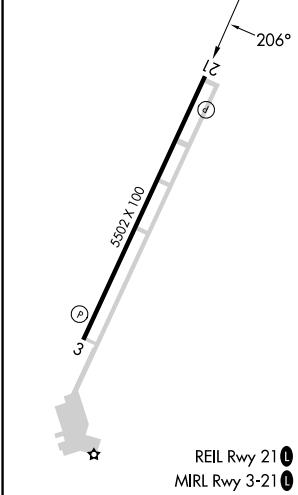

CATEGORY	A	B	C	D
LPV DA	565-1 250 (300-1)			
LNAV/VNAV DA	761-1⅓ 446 (500-1⅓)			
LNAV MDA	720-1	405 (500-1)	720-1½	405 (500-1½)
CIRCLING	840-1 525 (600-1)	860-1 545 (600-1)	1080-2¼ 765 (800-2¼)	1160-2¾ 845 (900-2¾)

NC-3, 11 JUN 2026 to 09 JUL 2026

NC-3, 11 JUN 2026 to 09 JUL 2026