WAAS CH **81909** **W35A**	APP CRS **352°**	Rwy Ldg **5110** TDZE **3176** Apt Elev **3188**

RNAV (GPS) RWY 35
SHALZ FLD (CBK)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using OEL altimeter setting. When local altimeter setting not received, use OEL altimeter setting and increase LPV DA to 3447 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 3497 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 5100 direct YEBVI and hold.

AWOS-3P	DENVER CENTER	UNICOM
118.175	**132.7 226.675**	**122.8** (CTAF) L

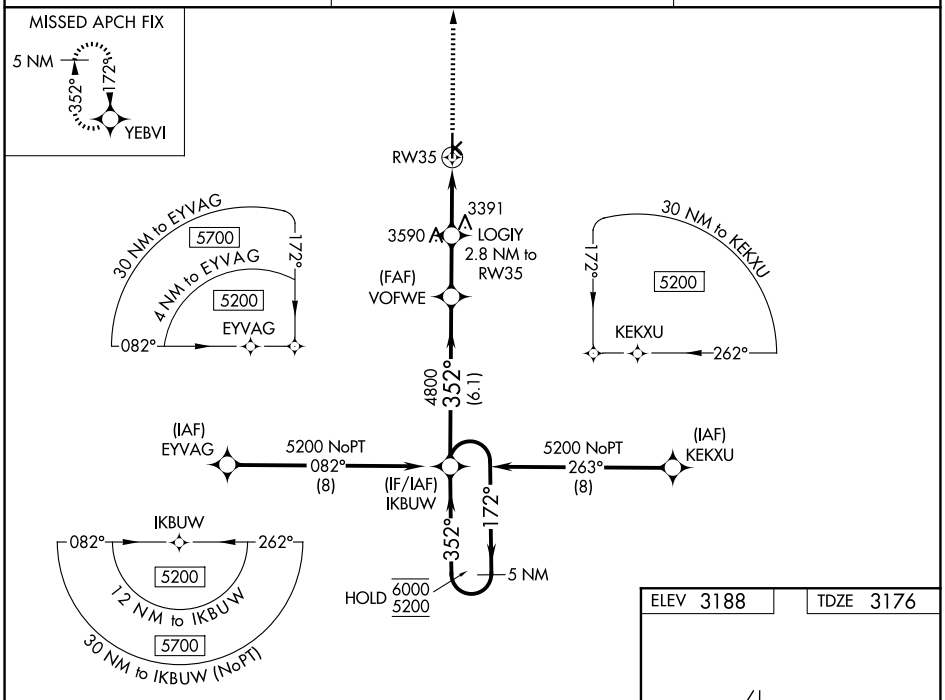

ELEV 3188 TDZE 3176

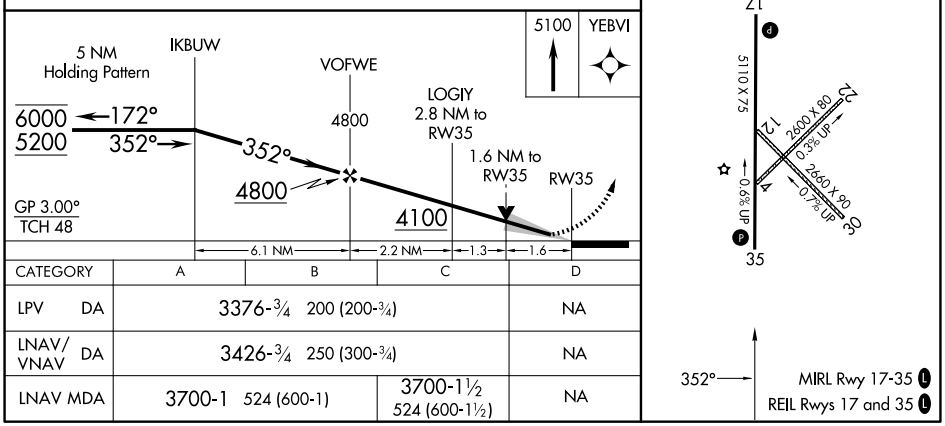

CATEGORY	A	B	C	D
LPV DA	3376-¾ 200 (200-¾)			NA
LNAV/VNAV DA	3426-¾ 250 (300-¾)			NA
LNAV MDA	3700-1 524 (600-1)		3700-1½ 524 (600-1½)	NA

NC-2, 11 JUN 2026 to 09 JUL 2026
NC-2, 11 JUN 2026 to 09 JUL 2026