RNAV (GPS) RWY 22

LEE C FINE MEML (AIZ)

WAAS	APP CRS	Rwy Ldg	6497
CH 72732	217°	TDZE	869
W22A		Apt Elev	869

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 22 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use OZS altimeter setting and increase LPV DA to 1168 feet. Increase LNAV/VNAV DA to 1220 feet. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA with OZS altimeter setting.

MISSED APPROACH: Climb to 3100 direct GIVMY and hold.

AWOS-3PT	MIZZU APP CON	UNICOM
135.325	124.1 353.925	122.8 (CTAF) L

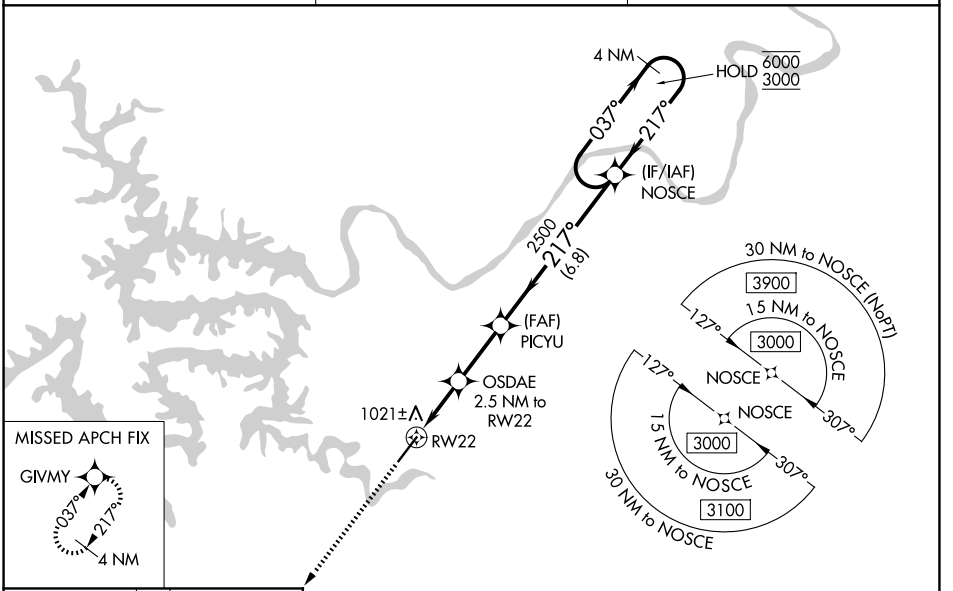

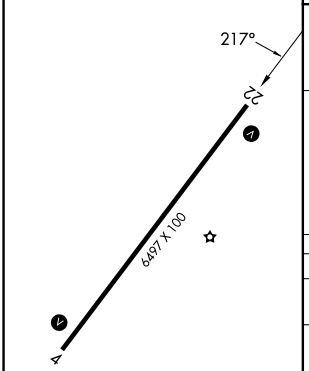

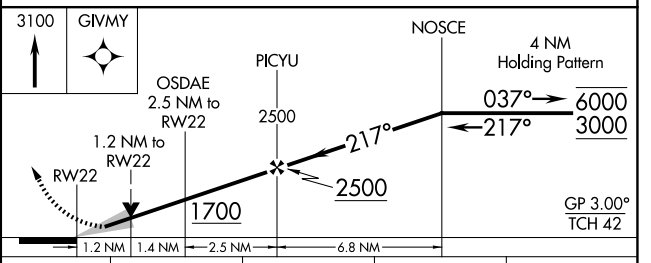

CATEGORY	A	B	C	D
LPV DA	1119-1 250 (300-1)			NA
LNAV/VNAV DA	1171-1 302 (400-1)			NA
LNAV MDA	1280-1 411 (500-1)		1280-1⅛ 411 (500-1⅛)	NA
CIRCLING	1340-1 471 (500-1)	1400-1 531 (600-1)	1440-1½ 571 (600-1½)	NA

MIRL Rwy 4-22

NC-3, 11 JUN 2026 to 09 JUL 2026
NC-3, 11 JUN 2026 to 09 JUL 2026